

ORDER INFORMATION

5 M H 1 S 3 0 N - 2 X X X X X X U - 1215 - 0 1

SPECIFICATIONS

CURRENT RATING: 3 AMP

INSULATION RESISTANCE: 1000MΩ MIN.

CONTACT RESISTANCE: 30mΩ MAX.

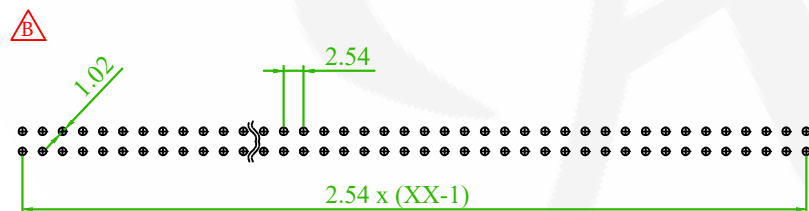
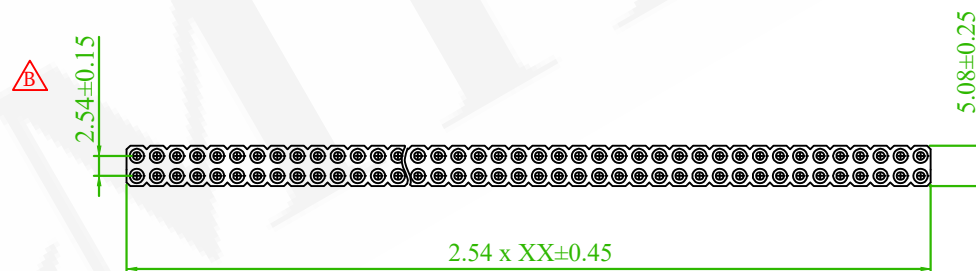
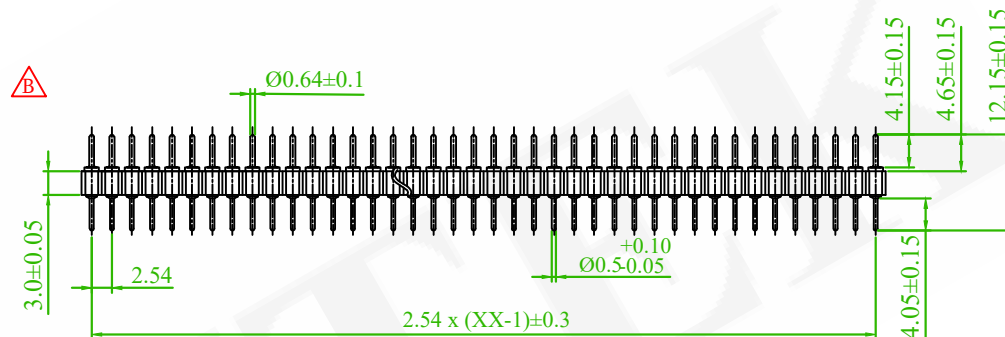
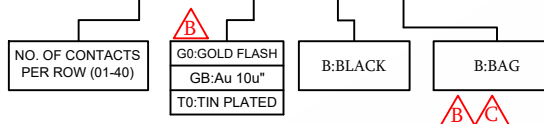
DIELECTRIC VOLTAGE: 1000V AC FOR ONE MINUTE

OPERATION TEMPERATURE: -40°C TO +105°C

MATERIAL

INSULATOR: PPS , UL94V-0

TERMINAL: BRASS

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

△	ECN-202605009 Revise the drawing	Roland	2026/05/28
△	ECN 202510037	Willy	2025/10/30
△	ECN 202509042	Willy	2025/10/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK

糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		MACHINE PIN HEADER 2.54mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.		5MH1S30N-2XXXXXXU-1215-01(CN032)				繪圖 DRAWN	Gary 2018/02/13
圖號 DRAWING NO.		GN032-GA993	版本 REV.	D	核對 CHECKED	Josh 2018/02/13	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/02/13	
公差 TOLERANCE		.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		