

ORDER INFORMATION

SPECIFICATIONS


CURRENT RATING: 3 AMP
 CONTACT RESISTANCE: 10mΩ MAX.
 DIELECTRIC VOLTAGE: 1000V AC FOR ONE MINUTE
 MECHANICAL LIFE: 500 CYCLES MIN $\triangle B$
 OPERATING TEMPERATURE: -40°C ~ +105°C

5 M H 2 R 2 8 N - 2 X X X X X X U - 0 0 0 0 - 0 1



NO. OF CONTACTS (02-40)	G0: GOLD FLASH	B: BLACK	T: TUBE
	GB: 10u"		X: BOX
	GF: 15u"		
	GD: 30u"		
	T0: TIN PLATED		

MATERIAL

HOUSING: PPS, UL94V-0 $\triangle B$
 TERMINAL: PHOSPHOR BRONZE $\triangle B$

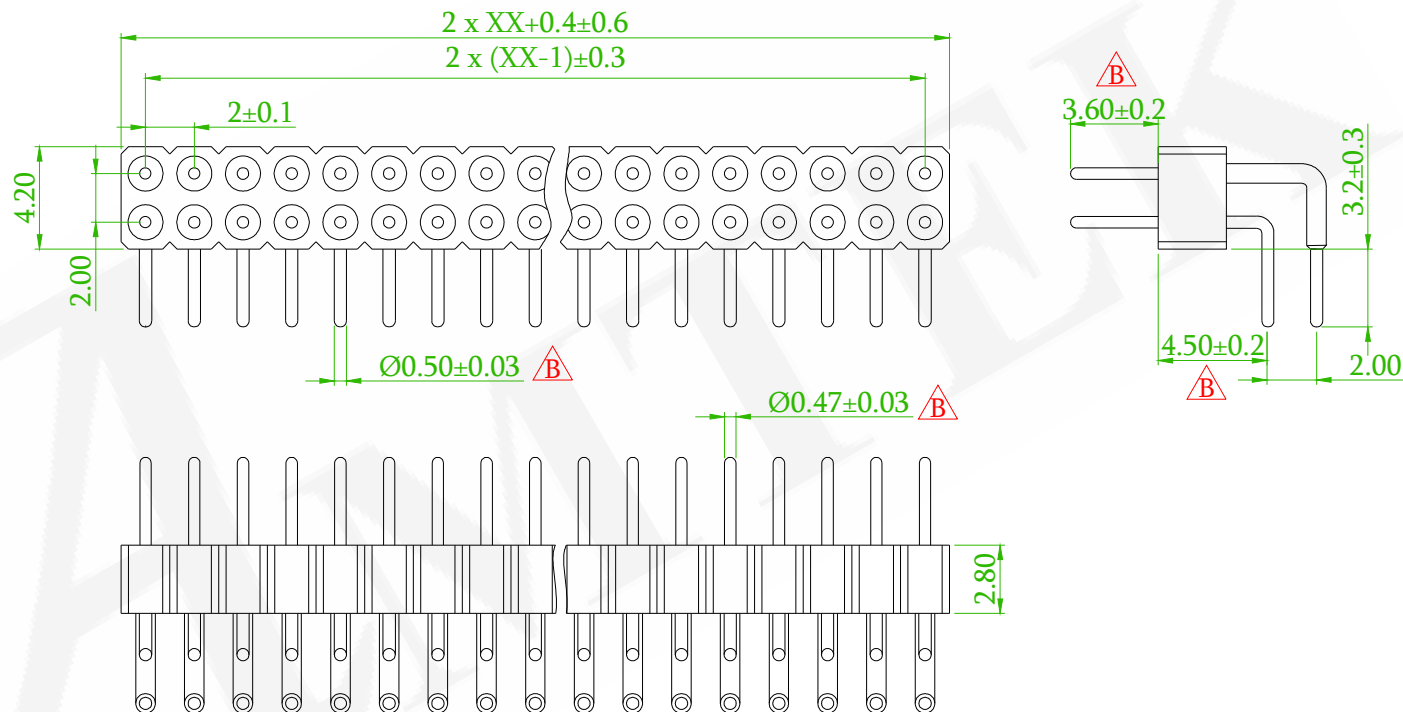

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

 懋德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN HEADER 2.0mm DIP R/A TYPE			頁數 Page	1/1
	品號 PART NO.	5MH2R28N-2XXXXXXU-0000-01(CN003)			繪圖 DRAWN	Gary
	圖號 DRAWING NO.	GN003-GA744	版本 REV.	B	核對 CHECKED	Jason
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason
	公差 TOLERANCE	.X ± 0.40	單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.XX ± 0.25				

$\triangle B$	ECN-202604066	Alice	2026/05/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE