

ORDER INFORMATION


5 M I 7 S 3 0 X - 7 X X X X X X U - 1000 - 0 1

SPECIFICATIONS



CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 10mΩ MAX.
DIELECTRIC VOLTAGE: 1000V AC FOR ONE MINUTE
OPERATING TEMPERATURE: -40°C ~ +105°C

MATERIAL



HOUSING: PPS+30%G.F, UL94V-0
TERMINAL: COPPER ALLOY

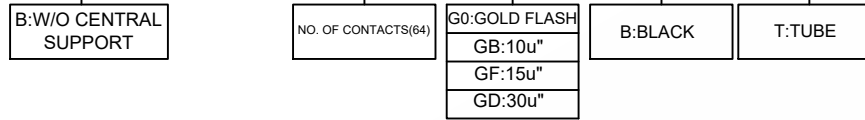

No. of contacts	PART NO.	Dimension	
		A	B
64	5MI7S30B-764XXXXXU-1000-01	57.30	55.118

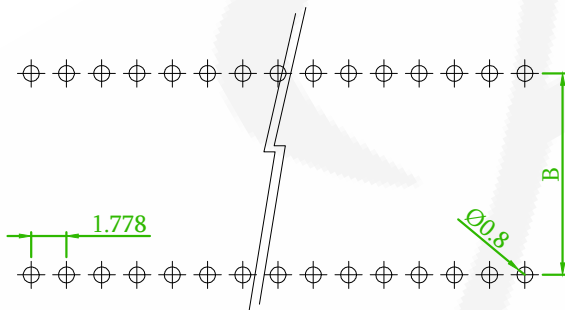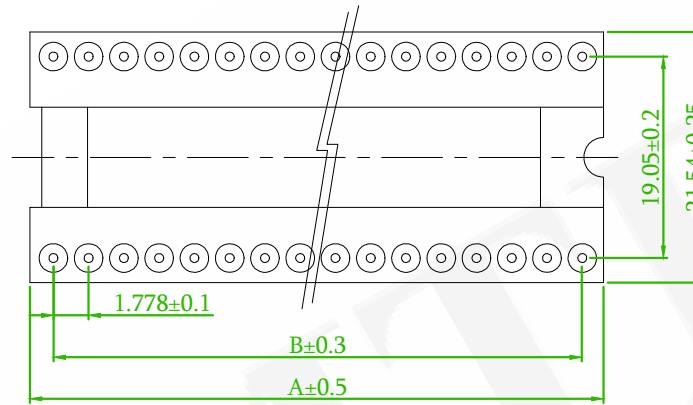

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

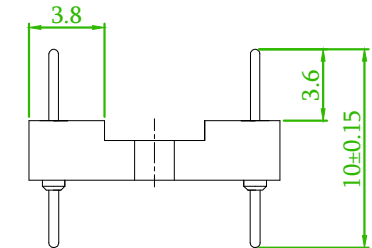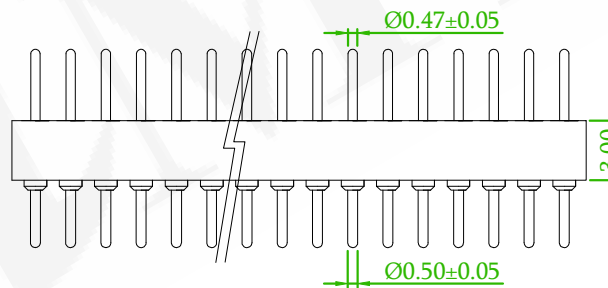

品名 TITLE	MACHINE PIN HEADER 1.778mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5MI7S30X-7XXXXXXU-1000-01(CN003)			繪圖 DRAWN	Andy 2017/11/02	
圖號 DRAWING NO.	GN003-AA221	版本 REV.	D	核對 CHECKED	Jason 2017/11/02	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/02	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△	ECN-202602029	Roland	2026/01/26
△	BPM 2024110103	Benson	2024/11/01
△x2	Revise the title & Dimension Table	JOSH	2020/03/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE