

ORDER INFORMATION





SPECIFICATION △

RATED CURRENT: ≤ 3.0 A
 RATED VOLTAGE: 60 V AC,DC
 CONTACT RESISTANCE: ≤10 mΩ
 INSULATION RESISTANCE: ≥1000 MΩ AT 100 V DC
 OPERATING TEMPERATURE:-40°C~+105°C
 DURABILITY: 200 CYCLES MIN

MATERIAL △

HOUSING:PPS,UL94V-0
 SLEEVE:BRASS
 CONTACT CLIP:BERYLLIUM COPPER

5 M S 1 S 3 0 N - 2 X X X X X X U - 0740 - 0 1

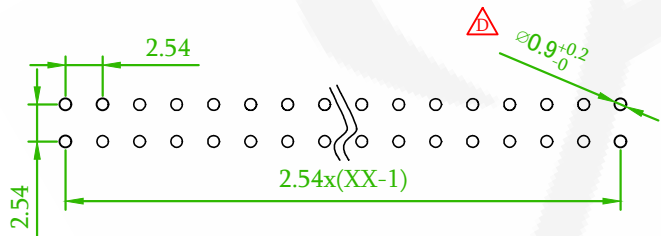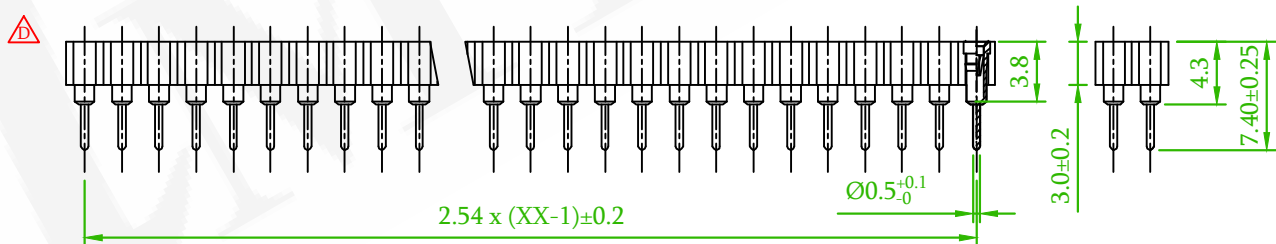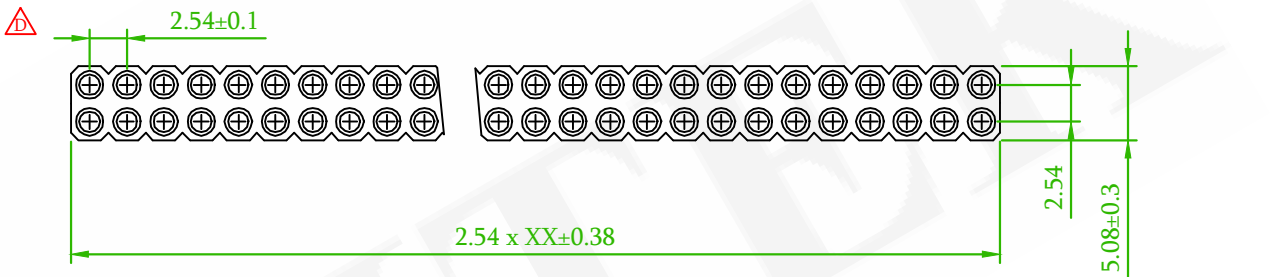

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

△	ECN 202604064	Willy	2026/05/08
△	ECN No.:231213 Revise the drawing	Randy	2024/01/04
△ x1	Add a package: X: Box.	Gary	2018/11/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懌德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MACHINE PIN SOCKET 2.54mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5MS1S30N-2XXXXXXU-0740-01(CN032)			繪圖 DRAWN	Jeff 2015/09/16	
圖號 DRAWING NO.	GN032-GB602	版本 REV.	D	核對 CHECKED	Josh 2018/11/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/26	
公差 TOLERANCE	.X±0.38	單位 UNIT	mm	THIRD ANGLE PROJECTION		
	.XX±0.25					