

ORDER INFORMATION

SPECIFICATIONS

CURRENT RATING: 3A
 OPERATING VOLTAGE: 60V AC/DC
 CONTACT RESISTANCE: 20mΩ MAX.
 INSULATION RESISTANCE: 1000MΩ AT 100V Min.
 OPERATION TEMPERATURE: -40°C TO +105°C
 AVERAGE INSERTION FORCE WITH STEEL PIN OF Ø0.46mm: 250g MAX
 AVERAGE WITHDRAWAL FORCE WITH STEEL PIN OF Ø0.46mm: 25g MIN

5 M S 2 S 2 8 N - 2 X X X X X X U - 0740 - 0 1

NO. OF CONTACTS PER ROW(01~40)

SO:SELECTIVE Au
 S3:3u"
 SF:15u"
 SD:30u"


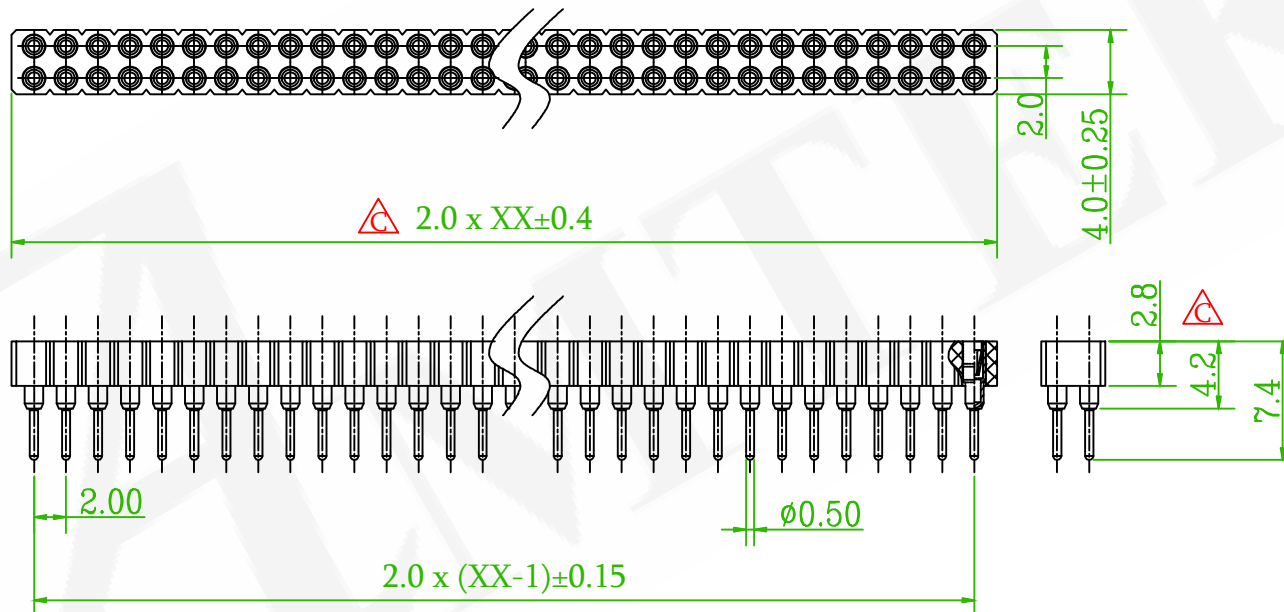
B:BLACK



B:BAG



X:BOX

MATERIAL

HOUSING: PPS, UL94V-0
 CONTACT CLIP (6 FINGERS): BERYLLIUM COPPER
 TERMINAL: BRASS



 懌德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	MACHINE PIN SOCKET 2.0mm DIP V/T TYPE			頁數 Page	1/1
	品號 PART NO.	5MS2S28N-2XXXXXXU-0740-01(CN032)			繪圖 DRAWN	Gary 2017/08/29
	圖號 DRAWING NO.	GN032-GA573	版本 REV.	C	核對 CHECKED	Carol 2017/08/29
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/08/29
	公差 TOLERANCE	.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	

	ECN-202604062 Revise the drawing	Gaby	2026/05/08
	Add: X:Box	David	2020/05/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE