

ORDER INFORMATION

5PH1MSA15-1XXXXU-ABC-00

MATERIAL INSULATOR: NYLON 9T, UL94V-0, BLACK
TERMINAL: BRASS

NO. OF CONTACTS
PER ROW(02-40)

G0:GOLD FLASH

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: TIN PLATED

S0:SELECTIVE Au

SA:SELECTIVE Au 5u"

S8:SELECTIVE Au 10u"

SC:SELECTIVE Au 20u"

SD:SELECTIVE Au 30u"

TE:TIN 200u"

A-A TYPE
(ODD PIN&EVEN PIN)

B-B TYPE
(ONLY EVEN PIN)

N:W/O PEG

R:T/R WITH CAP
(5 PIN 1)

H:T/R W/O CAP
(5 PIN 1)

C:TUBE WITH CAP
(5 PIN 1)

T:TUBE W/O CAP
(5 PIN 1)

EX:060050033


A:6.0

B:5.0


C:3.3



CAP DIM			APPLICABLE PRODUCT
L	w	H	
5.0	4.0	2.6	DIM A < 6.5, ≤ 1 x 4PIN
5.0	5.08	6.9	DIM A ≥ 6.5, ≤ 1 x 4PIN
8.0	4.0	4.5	> 1 x 4PIN

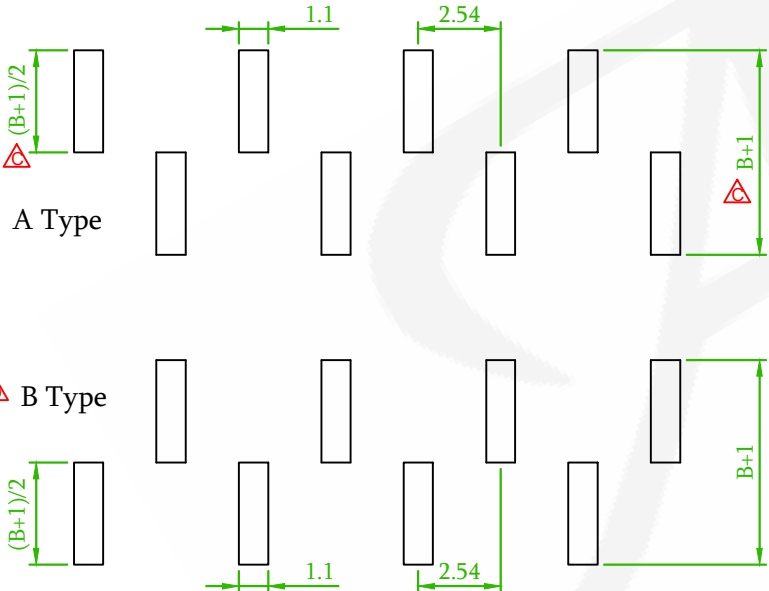

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

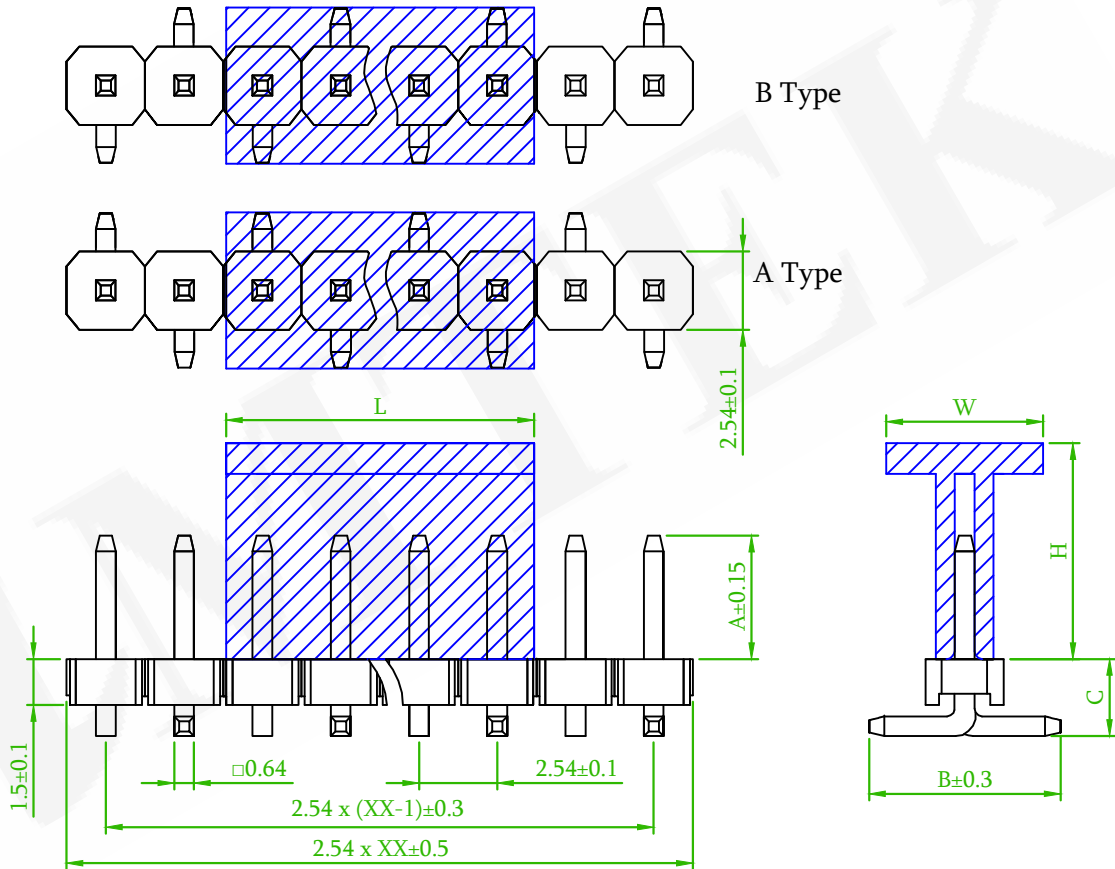

Old Part No. : PH1M15-1XX-U

	ECN-202608019	Willy	2026/08/28
	ECN NO.:211018 Revise the drawing	Alice	2021/11/11
	ECN No.:171201, Revise the Cap	Roy	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.54mm SMT V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5PH1MSA15-1XXXXXXXXU-00				繪圖 DRAWN	Joey 2016/09/06
	圖號 DRAWING NO.	GN016-GA132	版本 REV.	G	核對 CHECKED	Jonny 2016/09/06	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/06	
	公差 TOLERANCE	.X±0.38 .XX±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		