

ORDER INFORMATION

5 P H 1 M S A 2 5 - 1 X X X X X X U - A B C - 0 0

MATERIAL

INSULATOR: NYLON 9T, UL94V-0, BLACK

TERMINAL: BRASS

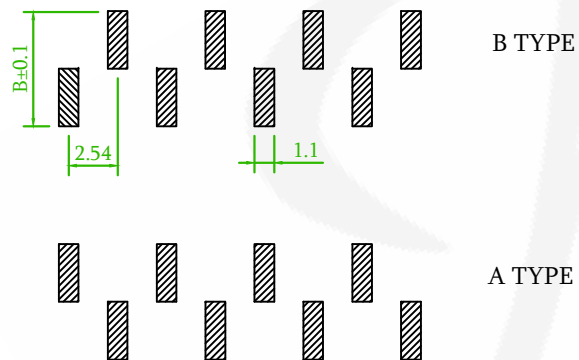
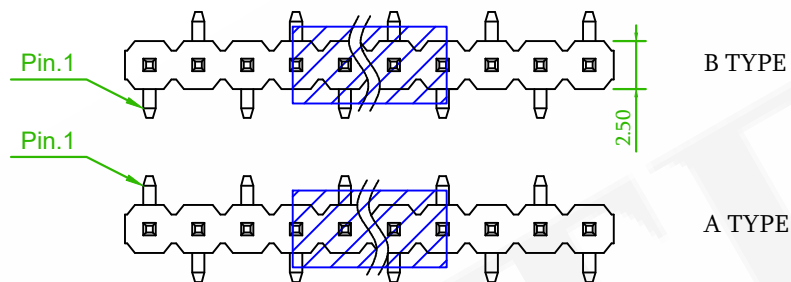

NO. OF CONTACTS
PER ROW(02~40)G0:GOLD FLASH
GA:AU 5U"
GB:AU 10U"
GC:AU 20U"
GD:AU 30U"
T0:TIN PLATED
TE:TIN 200U"S0:SELECTIVE AU
SA:SELECTIVE AU 5U"
SB:SELECTIVE AU 10U"
SC:SELECTIVE AU 20U"
SD:SELECTIVE AU 30U"
SF:SELECTIVE AU 15U"

N:W/O PEG

A:A TYPE
ODD PIN&EVEN PIN
B:B TYPE
(ONLY EVEN PIN)EX:060050033
A:6.0
B:5.0
C:3.3R:T/R WITH CAP
H:T/R W/O CAP
C:TUBE WITH CAP (5 PIN ↑)
T:TUBE W/O CAP (5 PIN ↑)

I

CAP DIM			APPLICABLE PRODUCT
L	w	H	
5.0	4.0	2.6	DIM A < 6.5, ≤ 1 x 4PIN
5.0	5.08	6.9	DIM A ≥ 6.5, ≤ 1 x 4PIN
8.0	4.0	4.5	> 1 x 4PIN

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

Old Part No. :PH1M25-1XX-U

I	ECN 202608019	Willy	2026/08/31
H	EasyFlow:202403060001	Alice	2024/03/07
G	ECN NO.:220517 Revise the drawing	Alice	2022/05/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE		PIN HEADER 2.54mm SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.		5PH1MSA25-1XXXXXXXXU-00				繪圖 DRAWN	Mia 2016/12/16
圖號 DRAWING NO.		GA000-MC147	版本 REV.	I	核對 CHECKED	Jonny 2016/12/16	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/12/16	
公差 TOLERANCE		.X±0.38 .XX±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		