

ORDER INFORMATION

MATERIAL

INSULATOR: NYLON 9T, UL94V-0, BLACK ▲

CONTACT PIN: BRASS

5 P H 1 R D A 2 5 - 1 X X X X N N X U - A B C - 0 0

1: SINGLE ROW

NO. OF CONTACTS PER ROW(2~40)

G0: GOLD FLASH	S0: SELECTIVE Au
GA: Au 5u"	SA: SELECTIVE Au 5u"
GB: Au 10u"	SB: SELECTIVE Au 10u"
GC: Au 20u"	SC: SELECTIVE Au 20u"
GD: Au 30u"	SD: SELECTIVE Au 30u"
T0: TIN PLATED	TE: TIN 200u"

N: NON TYPE

N: W/O PEG

U: ROHS+HI-TEMP.

X: BOX	B: BAG
C: TUBE WITH CAP	
R: T/R WITH CAP	
M: T/R WITH MYLAR	


EX: 060030039

A: 6.0
B: 3.0
C: 3.9

AMTEK 懽德

2025.04.18

Released DCC

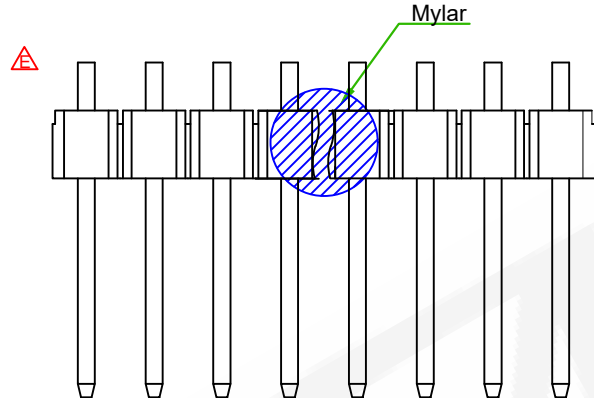


5PH1RDA25-1XXXXNNMU-XXXXXXXXXX-00

M: T/R WITH MYLAR



RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

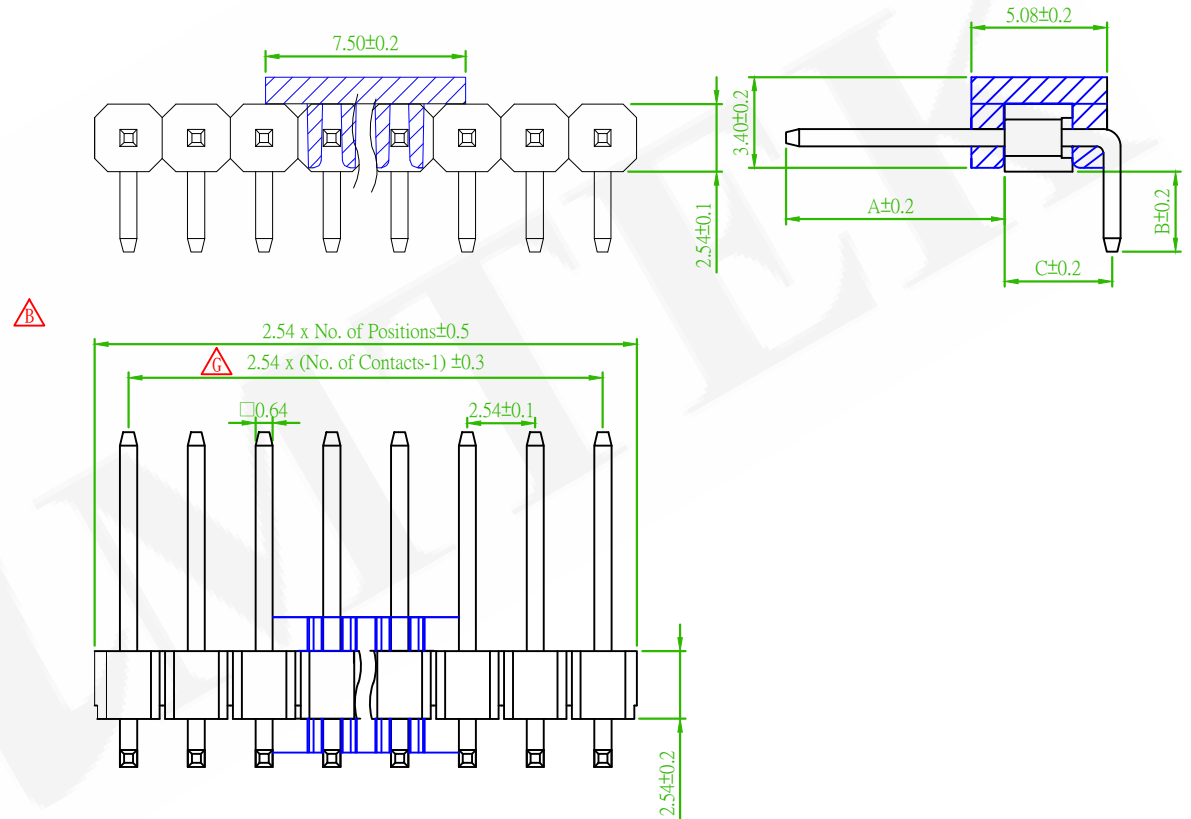

Old Part No. :PH1RD25-1XX-U

▲	ECN 202504002	Willy	2025/04/18
▲2	Add : M: T/R With Mylar	Alice	2021/10/6
▲	Add : M: T/R With Mylar	David	2020/02/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懽德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5PH1RDA25-1XXXXXXXXU-00				繪圖 DRAWN	Mia 2015/08/19
圖號 DRAWING NO.	GN016-GA142	版本 REV.	G	核對 CHECKED	John 2015/08/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/19	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		