




ORDER INFORMATION

MATERIAL

INSULATOR: NYLON 9T, UL 94V-0
CONTACT PIN: BRASS

5PH2RDA20-1XXXXU-A-B-C-00

NO. OF CONTACTS PER ROW(02~40)	G0:GOLD FLASH	S0:SELECTIVE Au	N:NON TYPE	U:RoHS	EX:035030030 A:3.5 B:3.0 C:3.0
	GA:Au 5u"	SA:SELECTIVE Au 5u"			
	GB:Au 10u"	SB:SELECTIVE Au 10u"			
	GC:Au 20u"	SC:SELECTIVE Au 20u"			
	GD:Au 30u"	SD:SELECTIVE Au 30u"			
	T0:TIN PLATED	TE:Tin 200u"			
			N:W/O PEG	X:BOX C:TUBE WITH CAP R:T/R WITH CAP	B:BAG

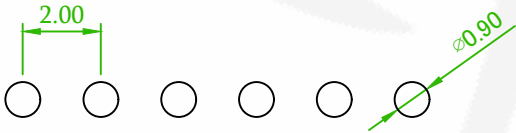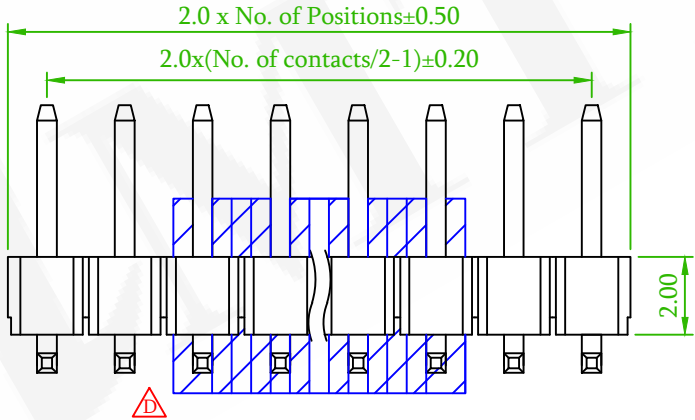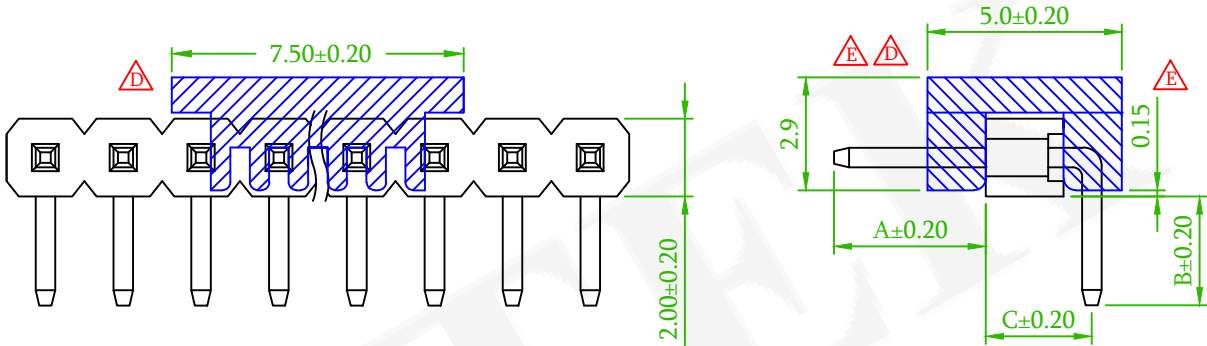

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

OLD PART NO. : PH2R20-1XX-U

E	ECN-202512047 Revise the drawing	Gaby	2026/01/05
D	BPM 20250415001 Revise the drawing	Gaby	2025/04/15
Cx2	ECN NO.:210916 Revise the drawing	Alice	2021/10/20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.00mm DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5PH2RDA20-1XXXXXXXXU-00				繪圖 DRAWN	MIA 2016/09/21
	圖號 DRAWING NO.	GW001-GA263	版本 REV.	E	核對 CHECKED	JONNY 2016/09/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	AARON 2016/09/21	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		