





MATERIAL

INSULATOR: NYLON 9T, UL 94V-0 , BLACK
TERMINAL:BRASS

ORDER INFORMATION

5PH2RDA20-2XXXXXXU-A-B-C-00

2:DUAL ROW	NO. OF CONTACTS PER ROW(02-40)	G0:GOLD FLASH GA:AU 5U" GB:AU 10U" GC:AU 20U" GD:AU 30U" T0:TIN PLATED	S0:SELECTIVE AU SA:SELECTIVE AU 5U" SB:SELECTIVE AU 10U" SC:SELECTIVE AU 20U" SD:SELECTIVE AU 30U" TE:TIN 200U"	N:NON TYPE N:W/O PEG	X:BOX C:TUBE WITH CAP R:T/R WITH CAP T:TUBE W/O CAP	U:ROHS +HI-TEMP.	EX:035024030 A:3.5 B:2.4 C:3.0
------------	--------------------------------	---	--	-------------------------	--	------------------	---

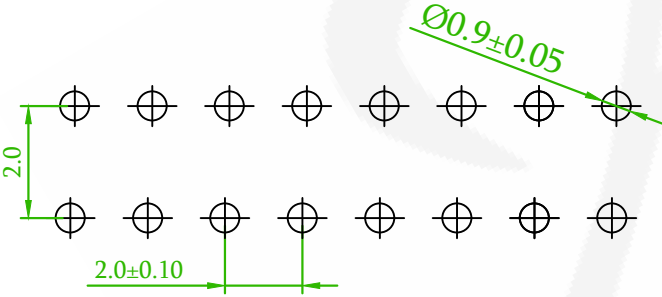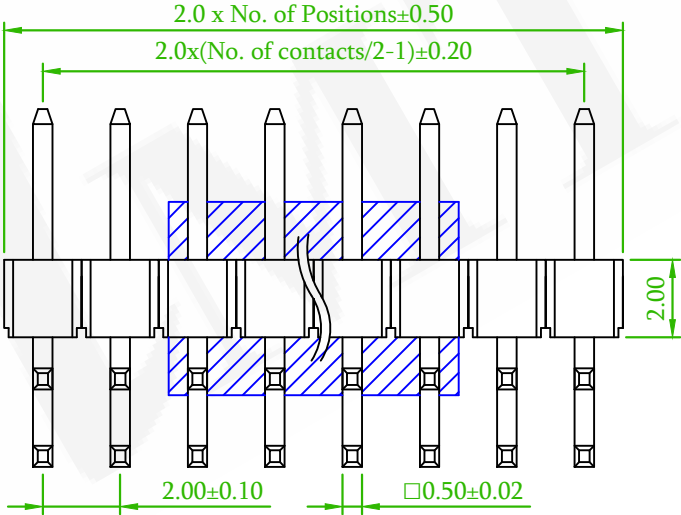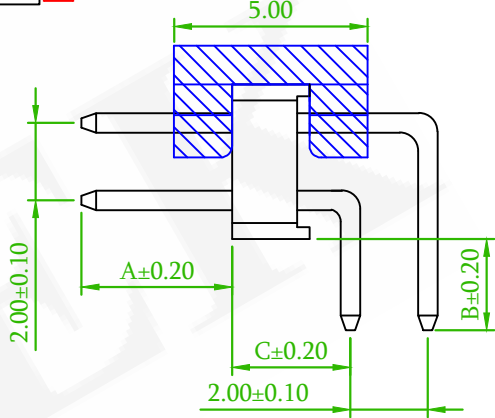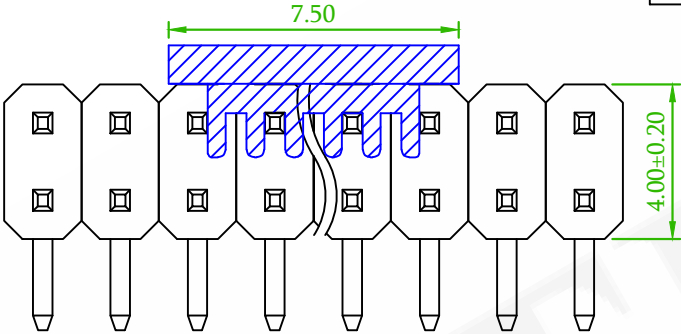

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

OLD PART NO. : PH2R20-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
G	ECN-202412001 Revise the drawing	Gaby	2024/12/26
F	ECN NO.:240630 Add the Cap	Benson	2024/07/05
E x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/7

Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.00mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5PH2RDA20-2XXXXXXU-00				繪圖 DRAWN	Athena 2015/08/17
圖號 DRAWING NO.	GN016-GA238	版本 REV.	G	核對 CHECKED	JOSH 2017/03/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/03/13	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		