

ORDER INFORMATION

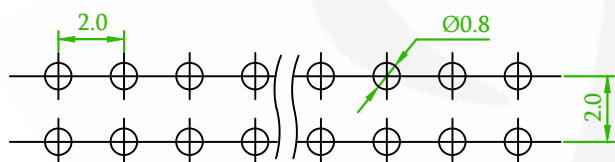
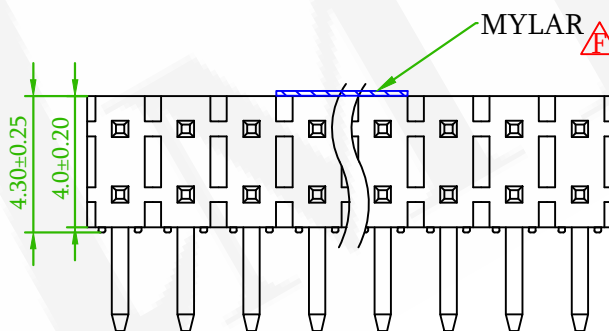
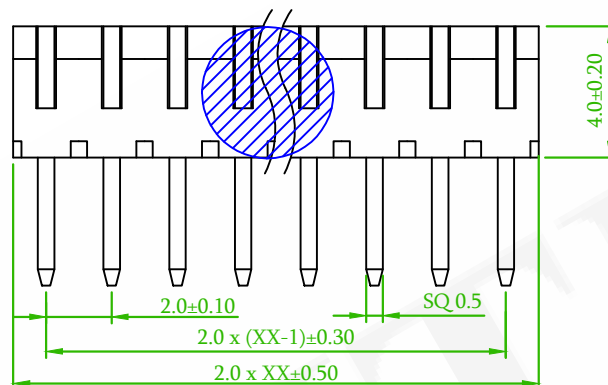
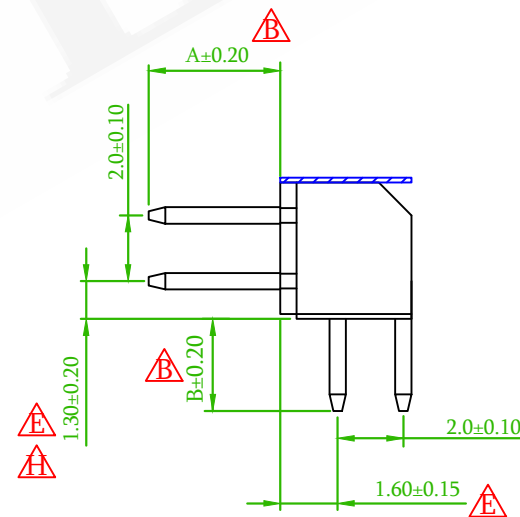
5 P H 2 R D A 4 0 - 2 X X X X X X U - A B 000 - 0 0

MATERIAL

INSULATOR: NYLON 9T, UL 94V-0

TERMINAL: BRASS

NO. OF CONTACTS PER ROW(02~40)	GG:GOLD FLASH	SS:SELECTIVE Au	N:NON PEG	N:NON TYPE
	GA:Au 5u	SA:SELECTIVE Au 5u		
	GB:Au 10u	SB:SELECTIVE Au 10u		
	GC:Au 20u	SC:SELECTIVE Au 20u		
	GD:Au 30u	SD:SELECTIVE Au 30u		
	TO:TIN PLATED			
	TE:TIN 200u			
			X:BOX	B:BAG
			T:TUBE W/O CAP	
			M:T/R WITH MYLAR	

EX:035024000
A:3.5
B:2.4RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

OLD PART NO. : PH2R40-2XX-U

H	ECN-202607032	Oliver	2026/07/28
Gx2	ECN NO.:210916 REVISE THE DRAWING	Alice	2021/10/7
Fx2	ADD:T/R WITH MYLAR	David	2019/09/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 懽德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 2.0mm DIP R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5PH2RDA40-2XXXXXXXU-00				繪圖 DRAWN	Athena 2015/08/17
	圖號 DRAWING NO.	GN016-MC058	版本 REV.	H	核對 CHECKED	John 2015/08/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		