

MATERIAL
INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: BRASS

ORDER INFORMATION

5 P H 3 D D A 2 5 - 2 X X X X X X U - A L 1 B - 0 0

2:DUAL ROW

NO. OF CONTACTS PER ROW(02~40)

G0:GOLD FLASH
GA:5u"
GB:10u"
GC:20u"
GD:30u"
T0:TIN PLATED

S0:SELECTIVE Au
SA:5u"
SB:10u"
SC:20u"
SD:30u"
TE:TIN 200u"

N:NON TYPE

N:W/O PEG


X:BOX

C:TUBE WITH CAP



RoHS

EX:030XXX028
A:3.0
L1:As Required
B:2.8

AMTEK 懽德
2025.05.26
Released DCC

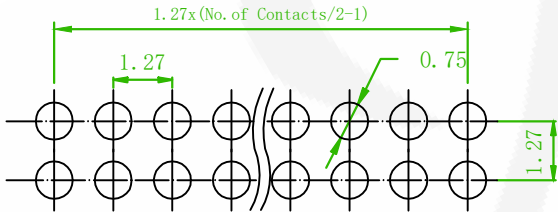

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

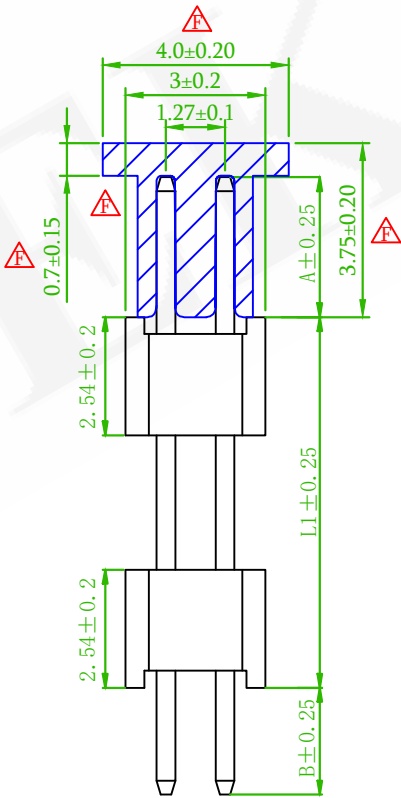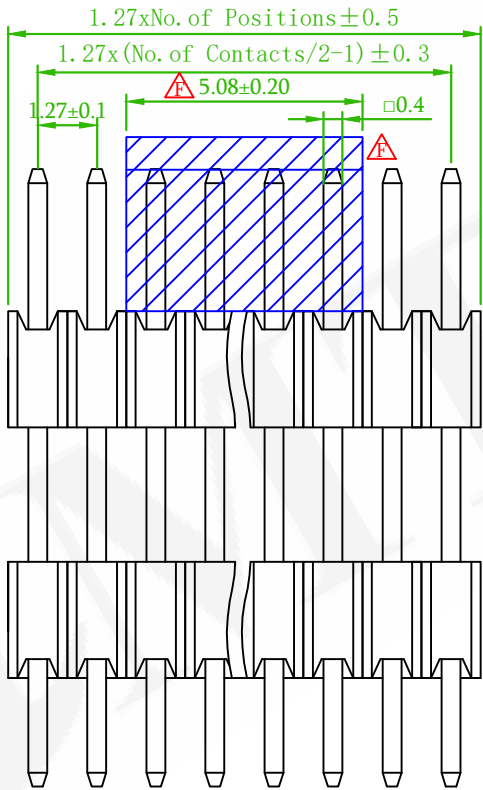

Old Part No. : PH3D25-2XX-U

	ECN 202505013	Willy	2025/05/26
	Easyflow:202401150004	Alice	2024/01/16
	ECN NO.:230707 Revise the drawing	Alice	2023/08/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.27mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PH3DDA25-2XXXXXXU-00				繪圖 DRAWN	Roy 2016/06/22
圖號 DRAWING NO.	GN110-GA303	版本 REV.	G	核對 CHECKED	Mavis 2016/06/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		