

ORDER INFORMATION

5 P H 5 M S A 1 5 - 2 X X X X X X X U - A/B/C - 0 0

MATERIAL

INSULATOR: NYLON 9T,UL 94V-0,BLACK
TERMINAL: BRASS

NO. OF CONTACTS
PER ROW(02~40)



GD:GOLD FLASH	SD:SELECTIVE Au
GA:Au 50 μ	SA:SELECTIVE Au 50 μ
GB:Au 100 μ	SB:SELECTIVE Au 100 μ
GC:Au 200 μ	SC:SELECTIVE Au 200 μ
GD:Au 300 μ	SD:SELECTIVE Au 300 μ
T: TIN PLATED	
TE: TIN 2000 μ	

N:W/O PEG
P:WITH PEG



N:NON TYPE

C:TUBE WITH CAP
R:T/R WITH CAP

EX:060067030
A:6.0(060)
B:6.7(067)
C:3.0(030)

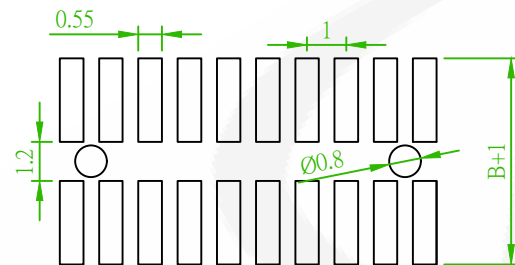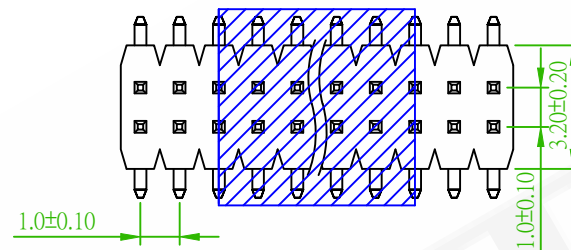

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

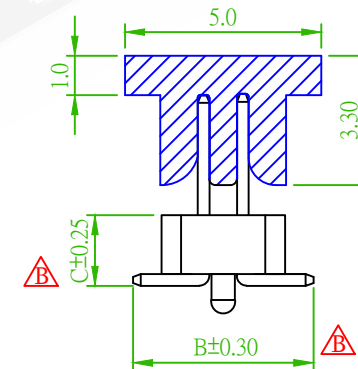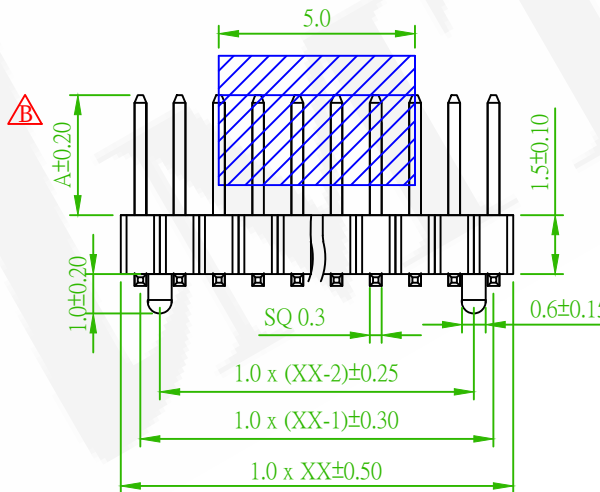

REV.	ECN-202608022	Willy	2026/08/25
	ECN NO. OR DESCRIPTION	REVISED	DATE


懋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.0mm SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PH5MSA15-2XXXXXXXXU-00				繪圖 DRAWN	Erin 2015/08/17
圖號 DRAWING NO.	GN016-GA358	版本 REV.	B	核對 CHECKED	John 2015/08/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/17	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		