

ORDER INFORMATION

5 P H 5 R D A 1 5 - 2 X X X X X X U - A/B/C - 0 0

MATERIAL B

HOUSING: NYLON 9T,UL 94V-0,BLACK
 TERMINAL: BRASS

NO. OF CONTACTS
 PER ROW(02~40)



N:W/O PEG

N:NON TYPE

X:BOX
 H:T/R W/O CAP
 T:TUBE W/O CAP
 B:BAG

EX:018018025
 A:1.80(018)
 B:1.80(018)
 C:2.50(025)

G0:GOLD FLASH	S0:SELECTIVE Au
GA:Au 5u"	SA:SELECTIVE Au 5u"
GB:Au 10u"	SB:SELECTIVE Au 10u"
GC:Au 20u"	SC:SELECTIVE Au 20u"
GD:Au 30u"	SD:SELECTIVE Au 30u"
T:TIN PLATED	
TE:TIN 200u"	

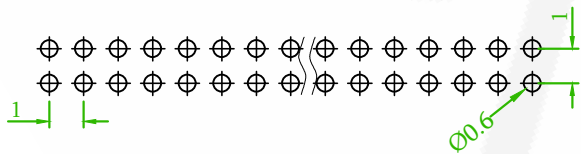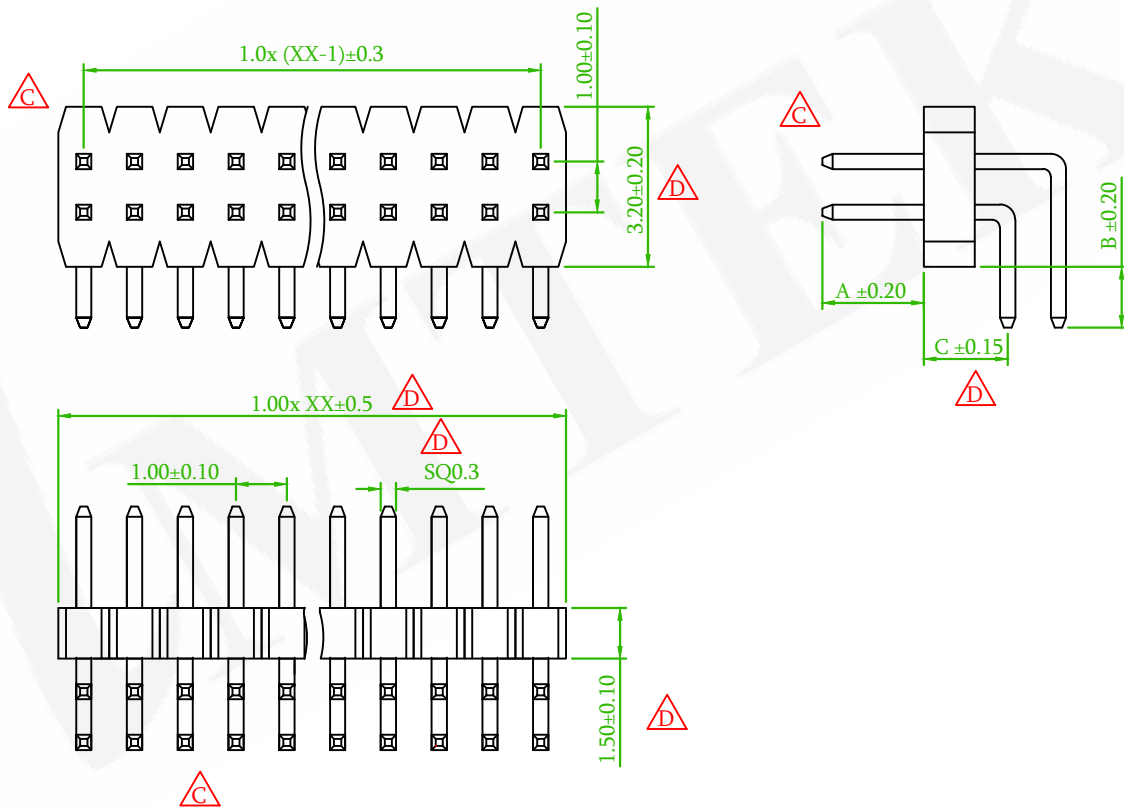

RECOMMENDED PCB LAYOUT
 (PCB TOLERANCE ±0.05)

OLD P/N : PH5R15-2XX-U

D	ECN 202605005	Willy	2026/05/13
C	BPM 20260420001	Oliver	2026/04/20
B x1	ECN NO.:230805 REVISE THE DRAWING	Alice	2023/08/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懌德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 1.0mm DIP R/A TYPE			頁數 Page	1/1
品號 PART NO.	5PH5RDA15-2XXXXXXXU-00			繪圖 DRAWN	Joe 2009/10/07
圖號 DRAWING NO.	GN003-GA004	版本 REV.	D	核對 CHECKED	Sinnys 2009/10/07
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2009/10/07
公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION	
	.XX ± 0.20				