

ORDER INFORMATION

MATERIAL

INSULATOR: LCP, UL94V-0, BLACK
CONTACT PIN: BRASS

5 P H 8 D D A 2 5 - 1 X X X X X X X P - A/L1/B - 0 0

NO. OF CONTACTS PER ROW(02~20)



G0:GOLD FLASH	S0:SELECTIVE Au
GA: Au 5u"	SA:SELECTIVE Au 5u"
GB: Au 10u"	SB:SELECTIVE Au 10u"
GC: Au 20u"	SC:SELECTIVE Au 20u"
GD: Au 30u"	SD:SELECTIVE Au 30u"
T0:TIN PLATED	
TE:TIN 200u"	

N:W/O PEG

N:NON TYPE

EX:030060040
A:3.0(030)
L1:6.0(060)
B:4.0(040)

X:BOX	B:BAG
R:T/R WITH CAP	H:T/R W/O CAP
C:TUBE WITH CAP	T:TUBE W/O CAP

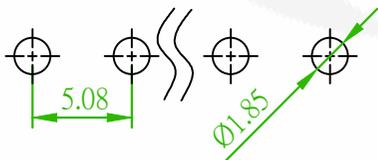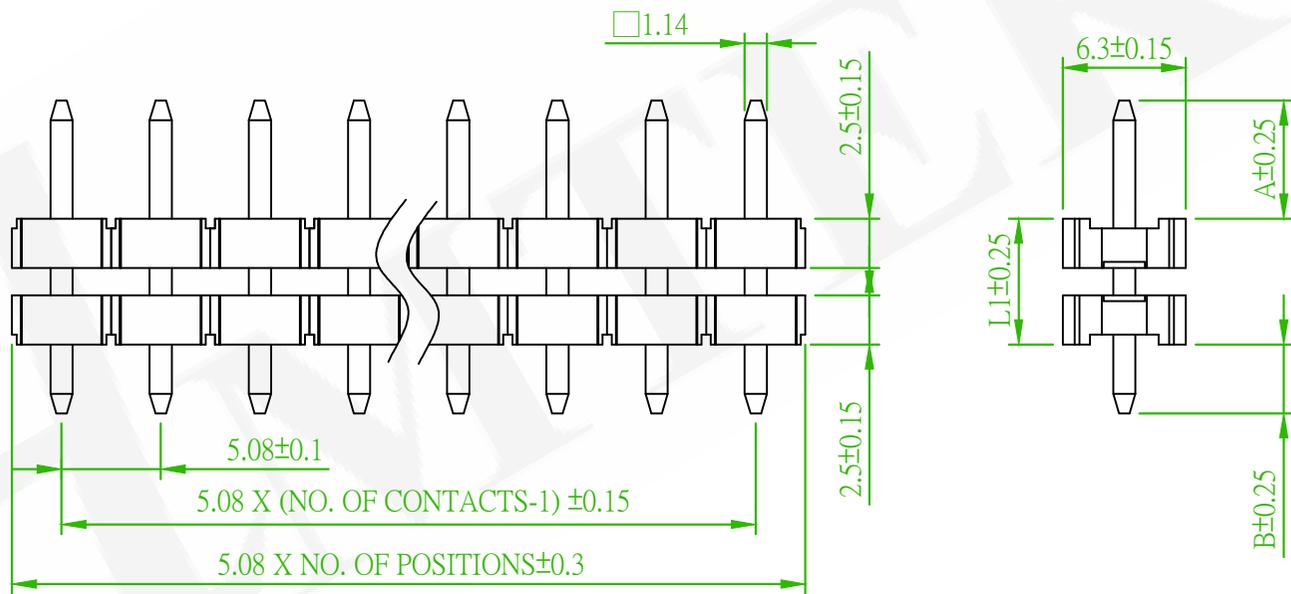

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

 懌德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN HEADER 5.08mm DIP V/T TYPE			頁數 Page	1/1
	品號 PART NO.	5PH8DDA25-1XXXXXXXXP-00			繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN003-BS168	版本 REV.	A	核對 CHECKED	Johnny 2016/09/19
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19
	公差 TOLERANCE	.X ± 0.40	單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.XX ± 0.25				

REV.	ECN-202602043	Oliver	2026/03/10
	ECN NO. OR DESCRIPTION	REVISED	DATE