

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 E A A 8 5 - 3 X X X X 5 X U XXXXXX - 0 0

3:Triple Row

No. of Pin
Per Row(02~40)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	


T:Tube W/O Cap
A:Tray W/O Cap

RoHS



See Table




TABLE			
	Add Number	Dim. A	Dim. B
110023	1	11.00	2.30
110074			7.35
110122			12.2
135049	2	13.50	4.85
135097			9.65
160023	3	16.00	2.30
160071			7.10
185046	4	18.50	4.60

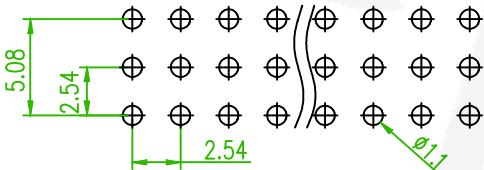

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

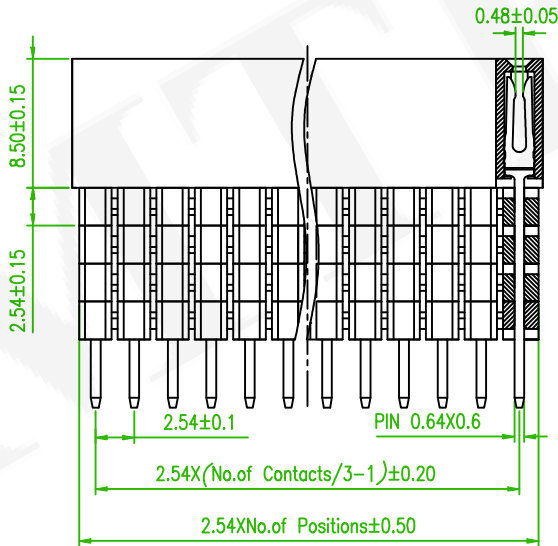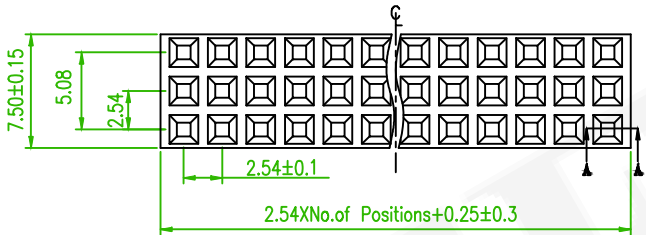

SECTION A-A

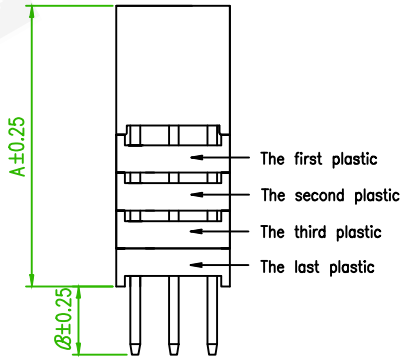

Old Part No. : PS1E-3XX-U



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1EAA85-3XXXXX5XU XXXXXX-00				繪圖 DRAWN	Mia 2017/12/04
圖號 DRAWING NO.	GN003-MC794	版本 REV.	B	核對 CHECKED	Jason 2017/12/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/12/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/30