

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 1 K S A 5 0 - 2 X X X X B N N X U - 0 0

2: Dual Row

No. of Pin
Per Row(02~40)

③ G0: Gold Flash	S0: Selective
GA: 5u"	SA: 5u"
GB: 10u"	SB: 10u"
GC: 20u"	SC: 20u"
GD: 30u"	SD: 30u"
T0: Tin Plated	
TE: Tin 200u"	

N: W/O Peg

B: With Bump

R: T/R with cap

C: Tube with cap

H: T/R W/O cap

T: Tube W/O cap

N: N Type


RoHS



AMTEK 糧德


2022.06.28

Released DCC

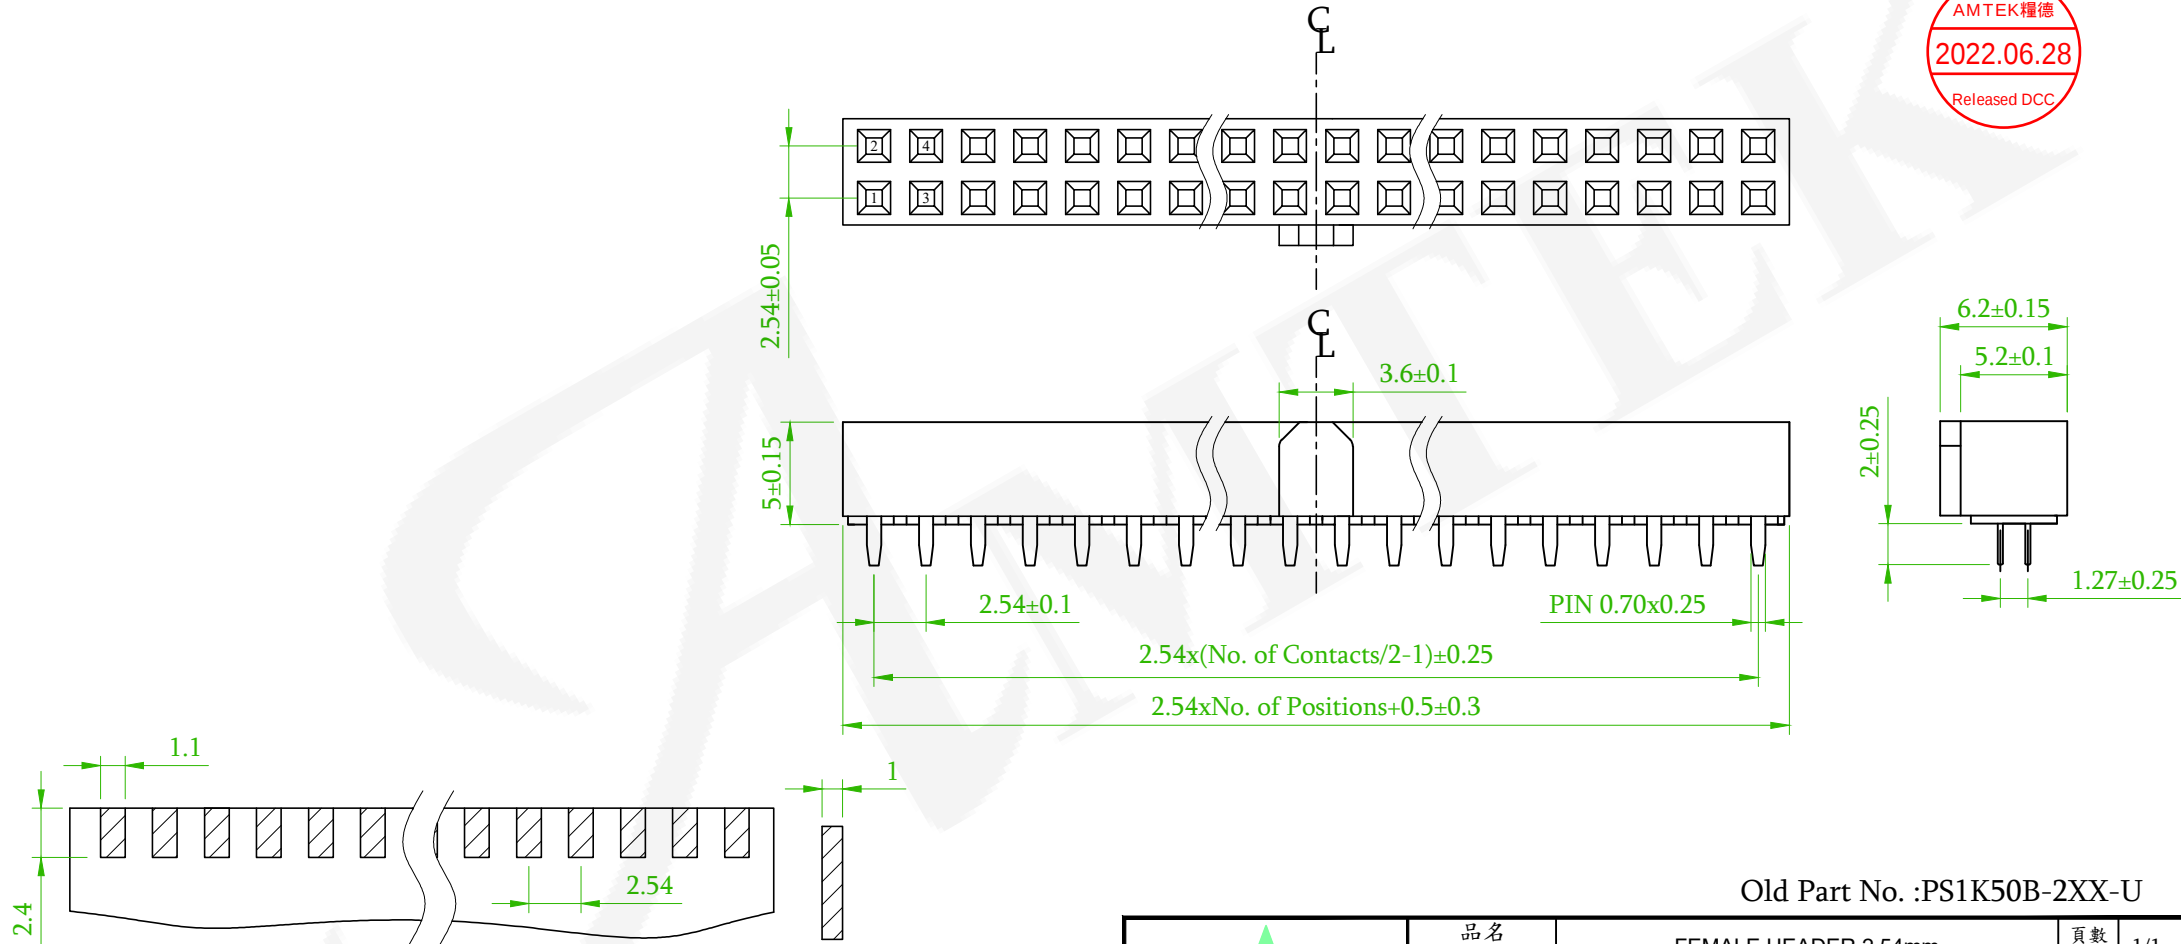

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No.: PS1K50B-2XX-U



品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1KSA50-2XXXXBNNXU-00				繪圖 DRAWN	Mia 2015/08/28
圖號 DRAWING NO.	GN003-GB790	版本 REV.	C	核對 CHECKED	Josh 2019/01/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/14	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

 x1	ECN NO.: 220102 Revise the drawing	Alice	2022/06/13
 x1	Add the Recommended Mating Part.	Gary	2019/01/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE