

MATERIAL Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass**ORDER INFORMATION**

5 P S 1 K S A 5 7 - 2 X X X X N N N X U - 0 0

2: Dual Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

R:T/R with cap

C:Tube with cap

H:T/R W/O cap

T:Tube W/O cap

N:N Type

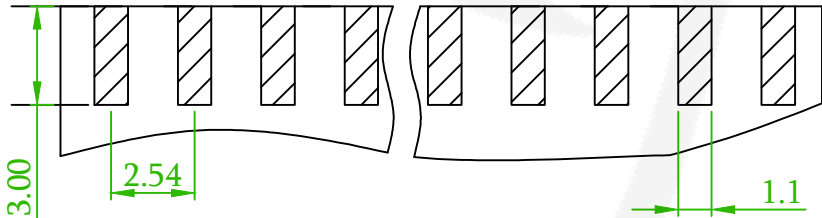
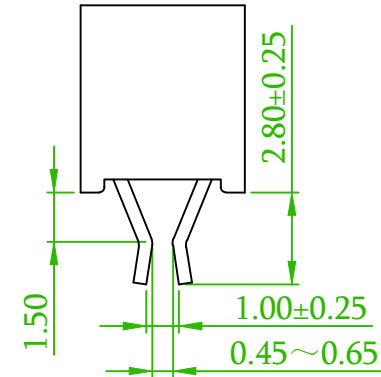
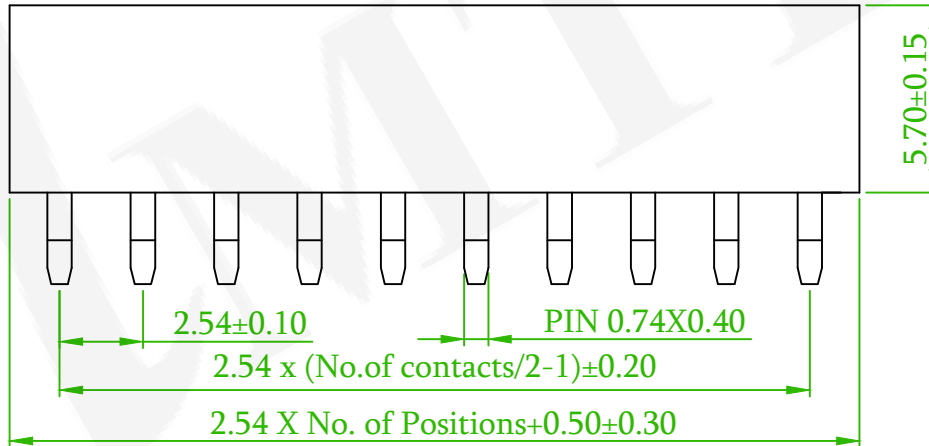
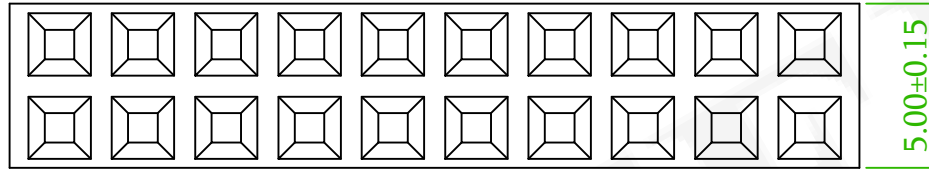
RoHS



AMTEK 糧德

2022.06.28

Released DCC

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PS1K57-2XX-U



品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1KSA57-2XXXXNNNXU-00				繪圖 DRAWN	Mia 2015/09/01
圖號 DRAWING NO.	GN003-AB395	版本 REV.	B	核對 CHECKED	John 2015/09/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/01	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO.:220102 Revise the drawing

Alice

2022/06/15

ECN NO. OR DESCRIPTION

REVISED

DATE