

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Phosphor Bronze


ORDER INFORMATION

5 P S 1 M H A 3 2 - 1 X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	◎T:Tube, W/O Cap H:Tape & Reel, W/O Cap	RoHS
		T0:Tin Plated TE:Tin 200u"		N:W/O Bump	N:Non Type	



AMTEK 耀德
2023.03.24
Released DCC

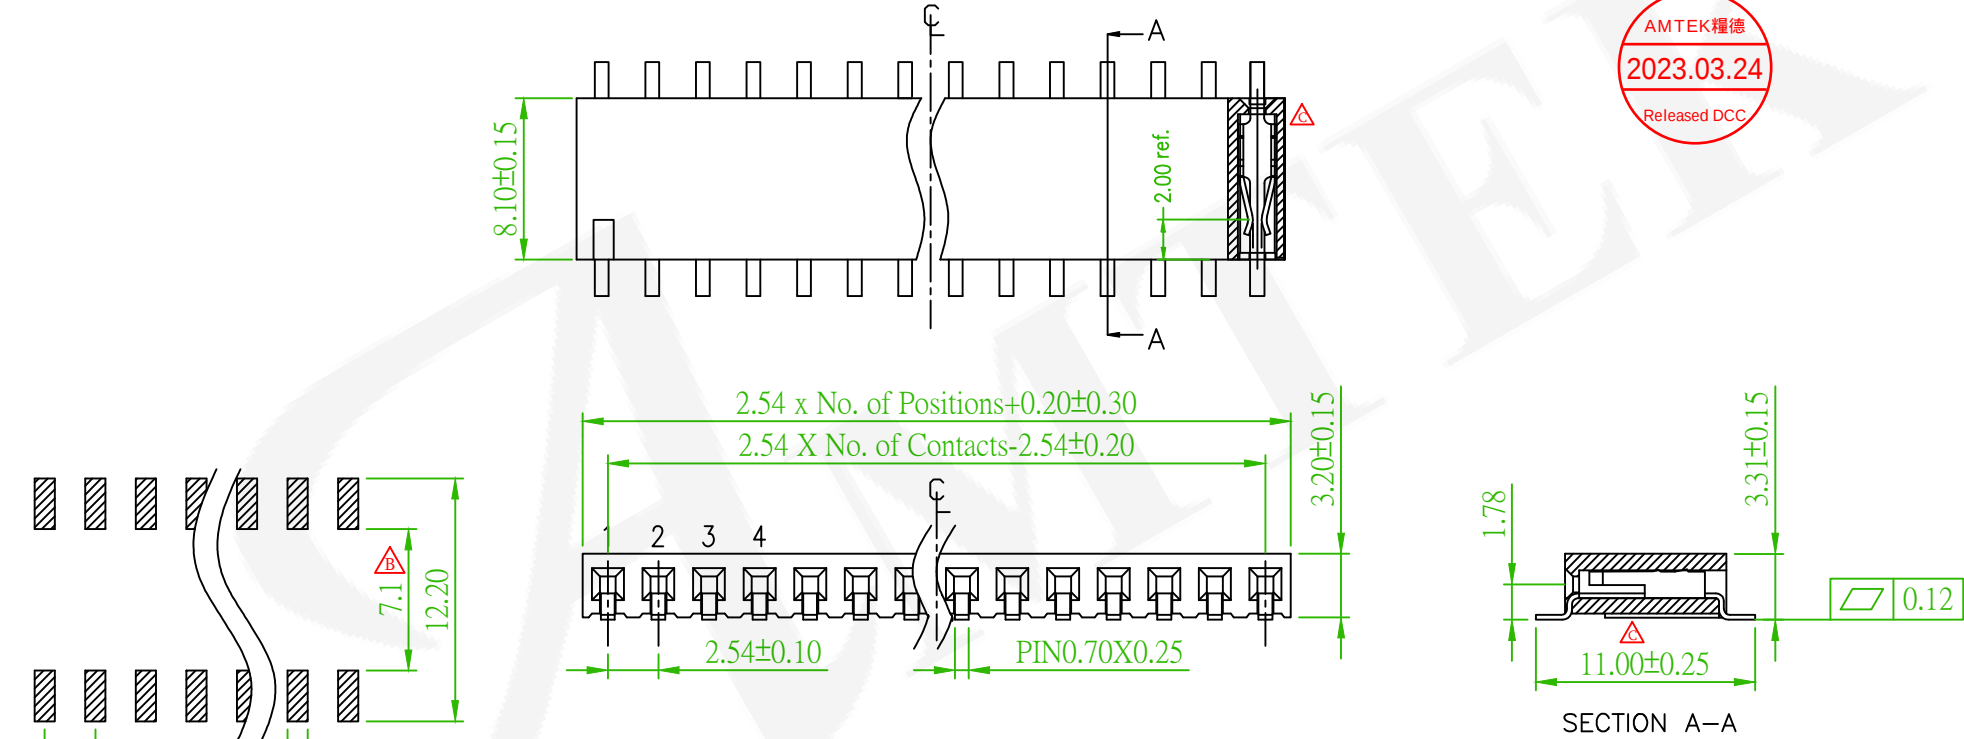

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No. : PS1MS-1XX-U

E x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/15
D x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/31
A x2	ECN 200917 : Revise the drawing	Alice	2020/10/16
REV.	DESCRIPTION	REVISED	DATE

Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1MHA32-1XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-DW092	版本 REV.	E	核對 CHECKED	John 2015/08/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	