



MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Phosphor Bronze



ORDER INFORMATION

5 P S 1 M H A 5 9 - 2 X X X X X X X U - 0 0

2:Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg P:Inner Peg	◎T:Tube, W/O Cap H:Tape & Reel, W/O Cap	RoHS
		T0:Tin Plated TE:Tin 200u"		N:W/O Bump	N:Non Type	

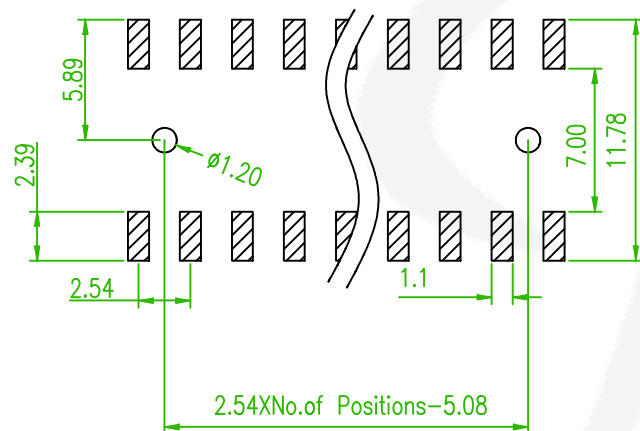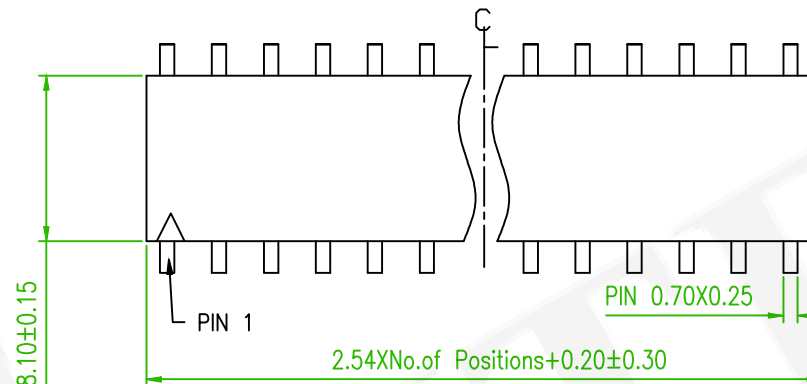

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

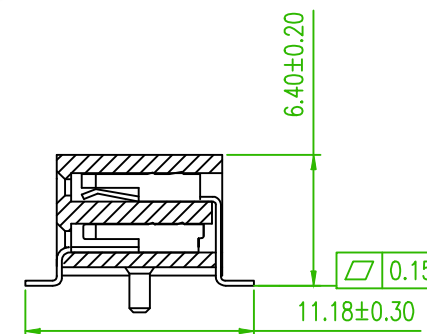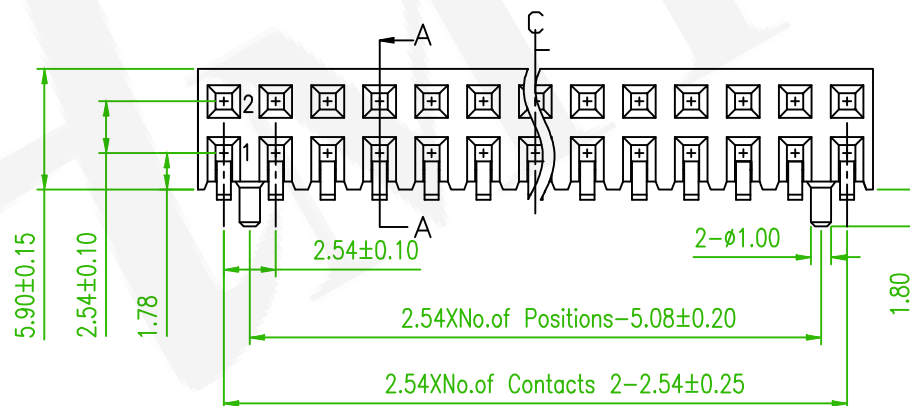

Old Part No. : PS1MS-2XX-U

△x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/15
△x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/31
△	Revise the drawing	B	2016/12/21 Roy
REV.	DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	△ 5PS1MHA59-2XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-RL253	版本 REV.	D	核對 CHECKED	John 2015/08/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	