

ORDER INFORMATION

5 P S 1 M S A 5 0 - 1 X X X X X X X X U - 0 0

SPECIFICATIONS

DIELECTRIC VOLTAGE: AC 500V FOR ONE MINUTE


MATERIAL

INSULATOR: NYLON 9T,UL94V-0
CONTACTS PIN:PHOSPHOR BRONZE




1:SINGLE ROW	NO. OF PIN PER ROW(02~40)	◎G0:GOLD FLASH S0:SELECTIVE GB:10U" SB:10U" GF:15U" SF:15U" GD:30U" SD:30U" T0:TIN PLATED	N:W/O PEG N:W/O BUMP	A:A TYPE B:B TYPE	RoHS
			R:T/R WITH CAP C:TUBE WITH CAP T:TUBE W/O CAP		

PIN	L	W	H1
05~40 PIN	8.00	4.00	4.00
02~04 PIN	5.10	3.40	2.25



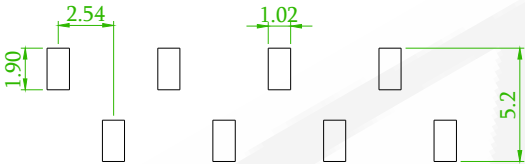


A TYPE

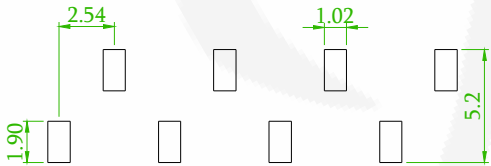

B TYPE

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

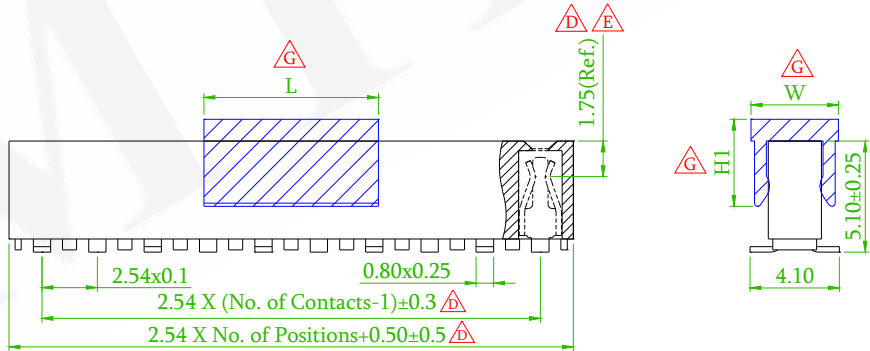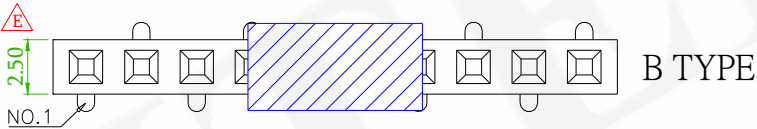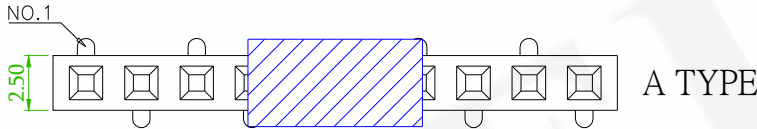

OLD PART NO. : PS1M50-1XX-U

△G	ECN-202502027	Alice	2025/03/07
△F _{x1}	ECN NO.:220102 Revise the drawing	Alice	2022/03/31
△E _{x2}	ECN NO.:210821 Revise the drawing	Benson	2021/09/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

	品名 TITLE	FEMALE HEADER 2.54mm SMT V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5PS1MSA50-1XXXXXXXXXU-00				繪圖 DRAWN	Mia 2018/03/12
	圖號 DRAWING NO.	GN003-MC990		版本 REV.	G	核對 CHECKED	JOSH 2019/05/03
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	JOSH 2019/05/03
	公差 TOLERANCE	X ± 0.38 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	