


ORDER INFORMATION

MATERIAL ⚠

INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: PHOSPHOR BRONZE

5 P S 1 M S A 5 0 - 2 X X X X X X X U - 0 0

NO. OF PIN PER ROW(02~40)	⚠	G0: GOLD FLASH		S0: SELECTIVE	N: W/O PEG P: WITH PEG	N: NON TYPE
	GB: 10u"	SF: 15u"	SD: 30u"			
	GF: 15u"	SF: 15u"	SD: 30u"	N: W/O BUMP	R: T/R WITH CAP C: TUBE WITH CAP T: TUBE W/O CAP	
	GD: 30u"	SF: 15u"	SD: 30u"		T0: TIN PLATED	

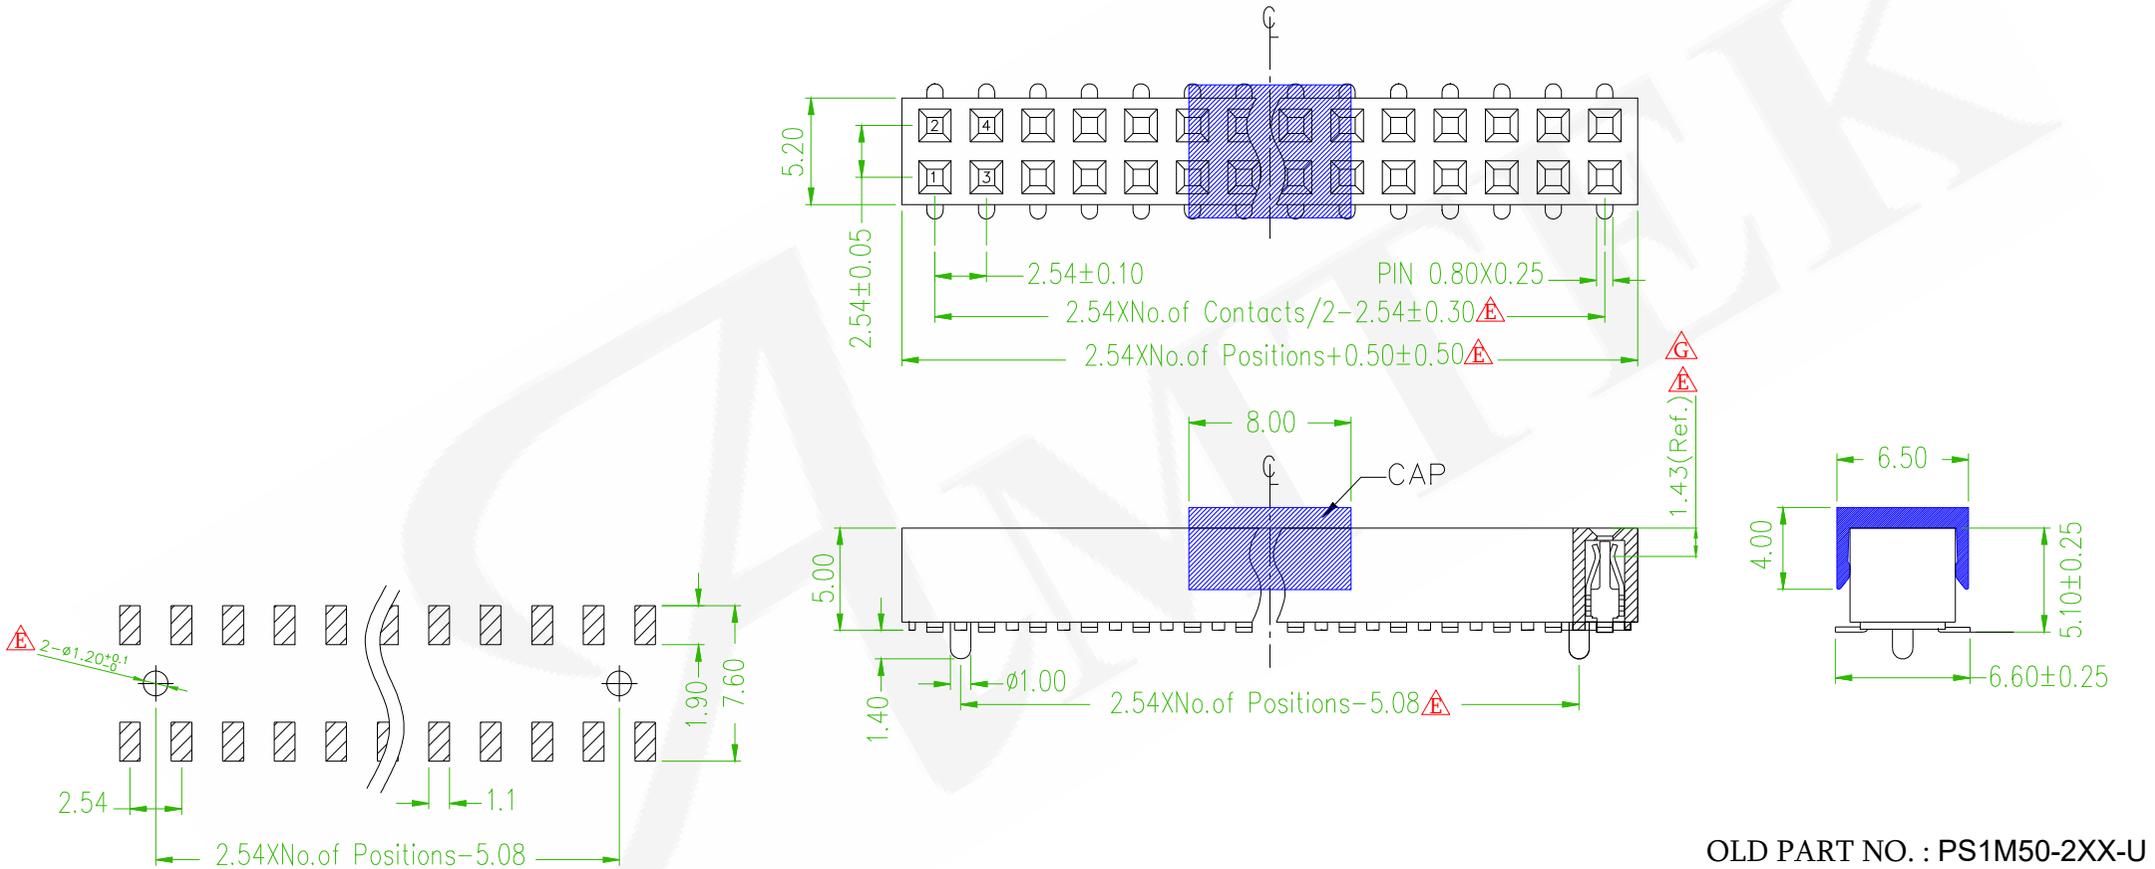

OLD PART NO. : PS1M50-2XX-U

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05) ⚠

⚠	ECN-202601053	Alice	2026/02/10
⚠	ECN NO.:220102 Revise the drawing	Alice	2022/03/31
⚠	ECN NO.:210807 Revise the Drawing	Benson	2021/08/31
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

懌德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN SOCKET 2.54mm SMT V/T TYPE			頁數 Page	1/1
品號 PART NO.	5PS1MSA50-2XXXXXXXXU-00			繪圖 DRAWN	Athena 2015/08/31
圖號 DRAWING NO.	GN003-RL535	版本 REV.	G	核對 CHECKED	John 2015/08/31
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/31
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	