


ORDER INFORMATION

MATERIAL


INSULATOR: NYLON9T, UL94V-0, BLACK
CONTACT PIN: BRASS

5 P S 1 M S A 8 5 - 2 X X X X N N N X U - 0 0



2:DUAL ROW	NO. OF PIN PER ROW(02~40)	◎G0:GOLD FLASH GA:5u" GB:10u" GC:20u" GD:30u" T0:TIN PLATED TE:TIN 200u"	S0:SELECTIVE SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O PEG	N:W/O KEY	RoHS
				N:W/O BUMP	R:T/R WITH CAP C:TUBE WITH CAP	H:T/R W/O CAP T:TUBE W/O CAP

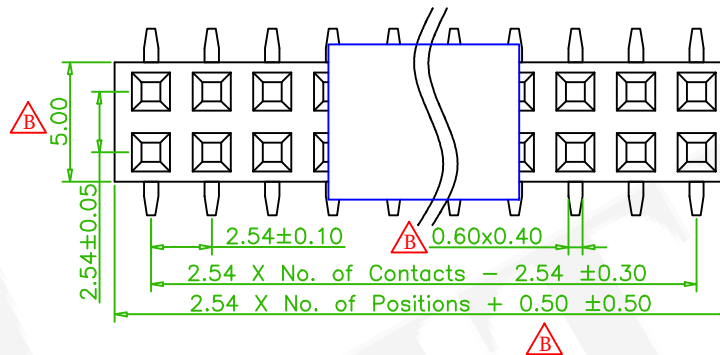

DIM.L	DIM.H	NOTE
5.20	4.30	02~04PIN
8.00	3.80	05~40PIN

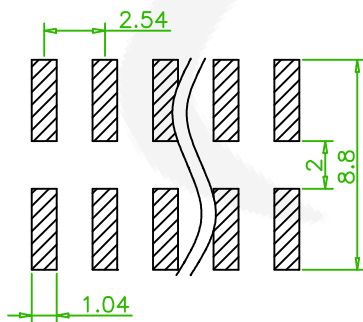

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

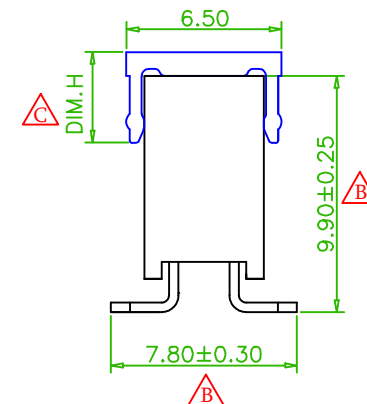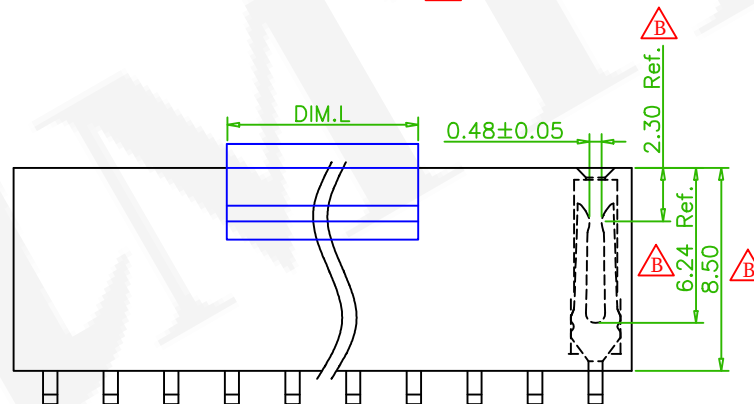

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm PLASTIC HEIGHT				頁數 Page	1/1
	品號 PART NO.	5PS1MSA85-2XXXXNNNXU-00				繪圖 DRAWN	Andy 2017/09/14
	圖號 DRAWING NO.	GN003-AA056	版本 REV.	C	核對 CHECKED	Carol 2017/09/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/09/14	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C	ECN NO.:240405 evise the Cap	Gaby	2024/04/24
△Bx10	ECN NO.:210612 Revise the drawing	Alice	2021/6/30