

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze


ORDER INFORMATION

5 P S 1 M S B 3 5 - 1 X X X X N N X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash	S0:Selective	N:W/O Peg	A:A Type B:B Type	RoHS
		GA:5u"	SA:5u"			
		GB:10u"	SB:10u"			
		GC:20u"	SC:20u"			
		GD:30u"	SD:30u"			
		T0:Tin Plated				
		TE:Tin 200u"				
				N:W/O Bump	R:T/R with cap C:Tube with cap	H:T/R W/O cap T:Tube W/O cap




AMTEK 糧德
2022.06.28
Released DCC

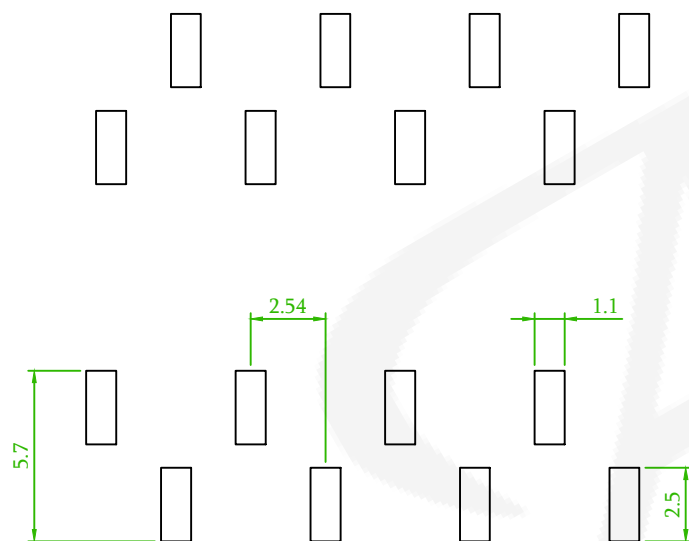


 Recommended PCB Layout
(PCB TOLERANCE ±0.05)


 B Type

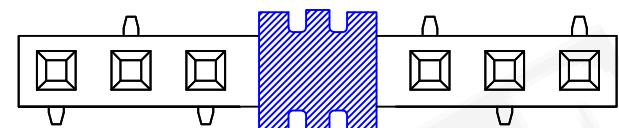

B Type

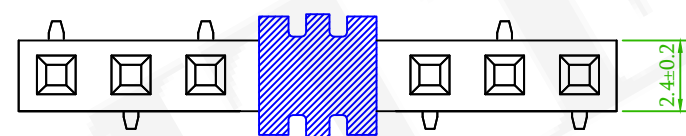

A Type

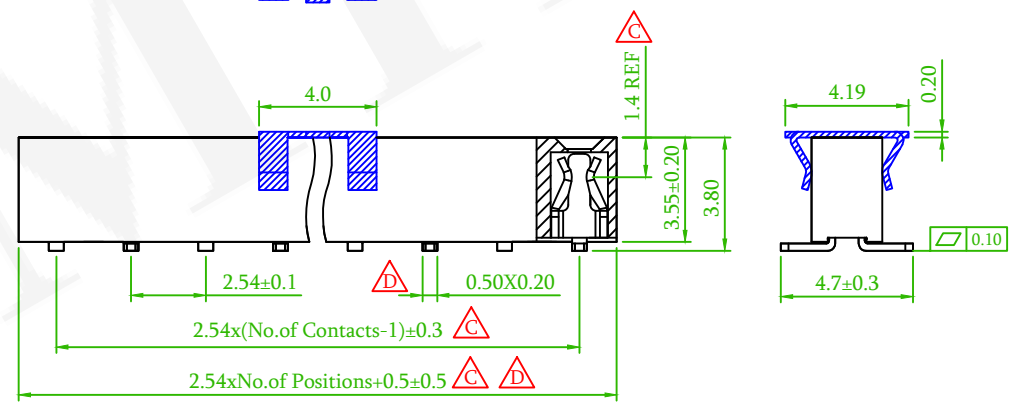

Old Part No. :PS1M35-1XX-U

 x1	ECN NO.:220102 Revise the drawing	Alice	2022/06/13
 x2	ECN 211109.: Revise the drawing	David	2021/11/22
 x6	ECN 210526.: Revise the drawing	David	2021/06/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1MSB35-1XXXXNNXXU-00				繪圖 DRAWN	Roy 2017/03/01
圖號 DRAWING NO.	GN110-RL528	版本 REV.	E	核對 CHECKED	Josh 2019/01/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/25	
公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		