

MATERIAL

Insulator: Nylon 9T,UL 94V-0
Contact Material:Phosphor Bronze



ORDER INFORMATION

5 P S 1 M S B 7 1 - 2 X X X X N X N X U - 0 0



2: Dual Row	No. of Pin Per Row(02~40)	G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	T0: Tin Plated TE: Tin 200u"	N: W/O Peg P: With Peg	N: W/O Bump	N: Non Type	R: T/R with cap C: Tube with cap	H: T/R W/O cap T: Tube W/O cap	X: Box	RoHS
-------------	---------------------------	---	--	---------------------------------	---------------------------	-------------	-------------	-------------------------------------	-----------------------------------	--------	------



Pin NO.	L	W	H1
≤ 4PIN	5.2	6.5	1.0
> 4PIN	7.5	7.7	1.0

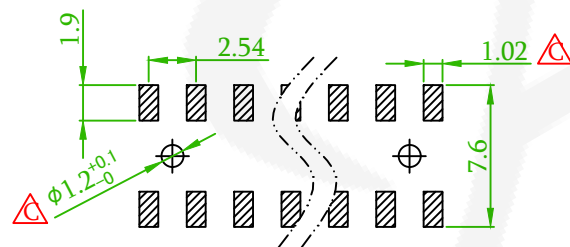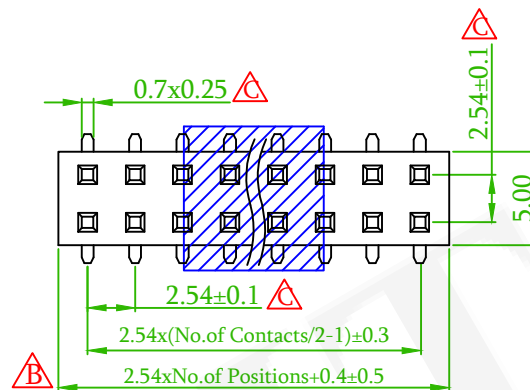

Recommended P.C.B Layout
(PCB BOARD TOLERANCE±0.05)

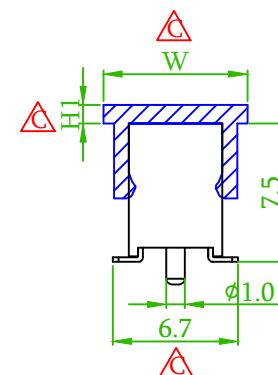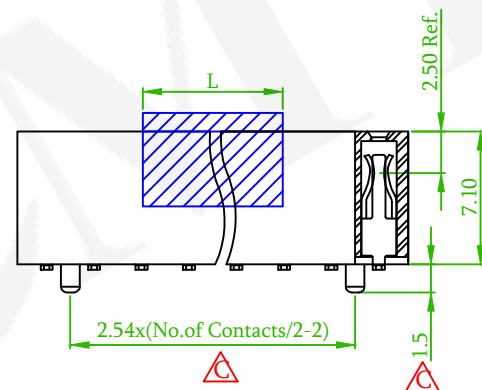

Old Part No. : PS1M71-2XX-U

Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm PLASTIC HEIGHT 7.1mm SMT STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5PS1MSB71-2XXXXNXXNU-00				繪圖 DRAWN	Sinnys 2010/10/21
	圖號 DRAWING NO.	GN005-RL220	版本 REV.	D	核對 CHECKED	Kelvin 2010/10/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/10/21	
	公差 TOLERANCE	.X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/22
△	ECN NO.:210732 Revise the drawing	Alice	2021/08/27
△	ECR No.:170641	B	2017/07/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE