

ORDER INFORMATION

5 P S 1 R D A 5 7 - 2 X X X X X X X U - 0 0

MATERIAL 
INSULATOR: NYLON 9T, UL94V-0, BLACK
TERMINAL: PHOSPHOR BRONZE 

NO. OF PIN
PER ROW (02~40)


GB: GOLD FLASH	SO: SELECTIVE
GA: 5U"	SA: 5U"
GB: 10U"	SB: 10U"
GC: 20U"	SC: 20U"
GD: 30U"	SD: 30U"
T0: TIN PLATED	
TE: TIN 200U"	

N: W/O PEG

N: W/O BUMP

◎T: TUBE, W/O CAP
C: TUBE, WITH CAP
H: TAPE & REEL, W/O CAP
R: TAPE & REEL, WITH CAP

N: NON TYPE

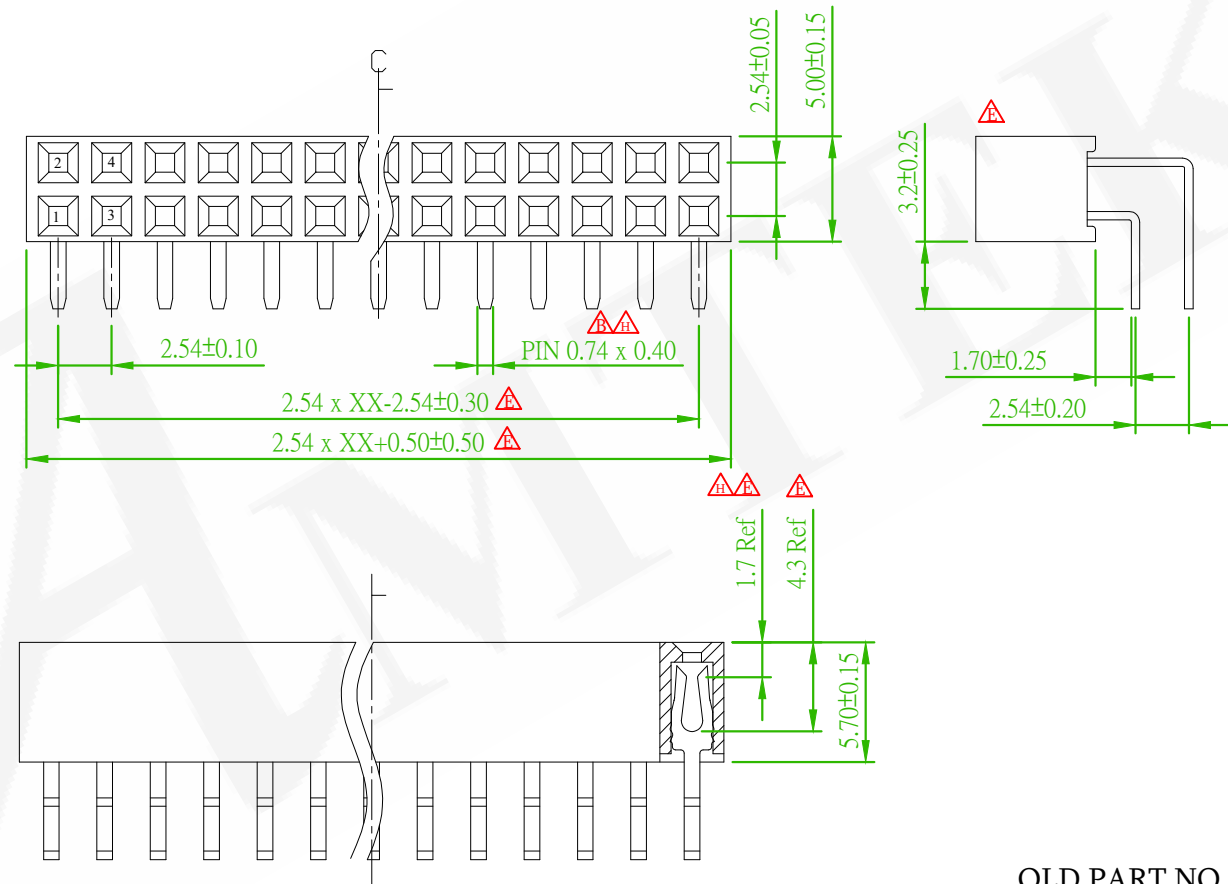

OLD PART NO. : PS1R57-2XX-U

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05) 

	ECR 202606046	Willy	2026/06/18
	ECN No.: 240533 Revise the drawing	Randy	2024/06/12
	ECN NO.: 220102 Revise the drawing	Alice	2022/05/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


懽德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN SOCKET 2.54mm DIP R/A TYPE				頁數 Page	1/1
品號 PART NO.	5PS1RDA57-2XXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/28
圖號 DRAWING NO.	GN003-BS691	版本 REV.	H	核對 CHECKED	John 2015/08/28	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/28	
公差 TOLERANCE	.X $\pm$ 0.38 .XX $\pm$ 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		