

MATERIAL △

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass




ORDER INFORMATION

5 P S 1 S D A 3 5 - 1 X X X X N N N X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	<table><tr><td>◎G0:Gold Flash</td><td>S0:Selective</td></tr><tr><td>GA:5u"</td><td>SA:5u"</td></tr><tr><td>GB:10u"</td><td>SB:10u"</td></tr><tr><td>GC:20u"</td><td>SC:20u"</td></tr><tr><td>GD:30u"</td><td>SD:30u"</td></tr><tr><td colspan="2">T0:Tin Plated</td></tr><tr><td colspan="2">TE:Tin 200u"</td></tr></table>	◎G0:Gold Flash	S0:Selective	GA:5u"	SA:5u"	GB:10u"	SB:10u"	GC:20u"	SC:20u"	GD:30u"	SD:30u"	T0:Tin Plated		TE:Tin 200u"		N:W/O Peg	N:Non Type	U:RoHS+Hi Temp
◎G0:Gold Flash	S0:Selective																		
GA:5u"	SA:5u"																		
GB:10u"	SB:10u"																		
GC:20u"	SC:20u"																		
GD:30u"	SD:30u"																		
T0:Tin Plated																			
TE:Tin 200u"																			
		N:W/O Bump	<table><tr><td>X:Box</td><td>B:Bag</td></tr><tr><td>R:T/R with cap</td><td>H:T/R W/O cap</td></tr><tr><td>C:Tube with cap</td><td>T:Tube W/O cap</td></tr></table>	X:Box	B:Bag	R:T/R with cap	H:T/R W/O cap	C:Tube with cap	T:Tube W/O cap										
X:Box	B:Bag																		
R:T/R with cap	H:T/R W/O cap																		
C:Tube with cap	T:Tube W/O cap																		



AMTEK 糧德
2022.06.27
Released DCC

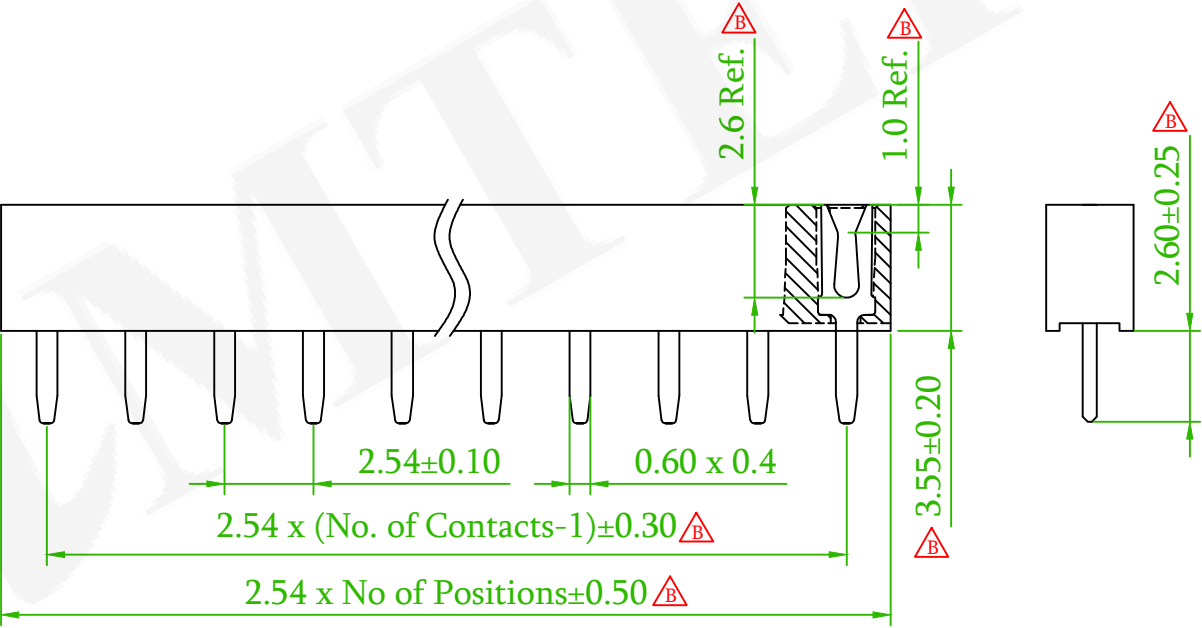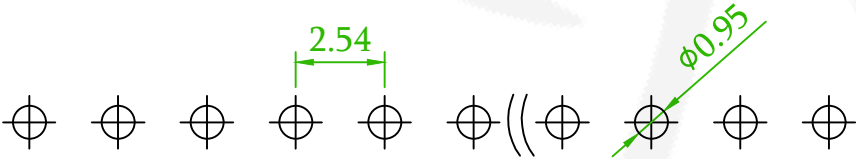

Recommended PCB Layout
(PCB TOLERANCE ±0.05) △

△ Cx1	ECN NO.:220102 Revise the drawing	Alice	2022/05/03
△ Bx7	ECN NO.:210627 Revise the drawing	Alice	2021/07/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1SDA35-1XXXXNNNXU-00				繪圖 DRAWN	Joey 2016/09/01
圖號 DRAWING NO.	GN003-DV486	版本 REV.	C	核對 CHECKED	Jonny 2016/09/01	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/01	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	