

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black

Contact Pin:Brass

ORDER INFORMATION

5 P S 1 S D A 3 5 - 2 X X X X N N N X U - 0 0

2:Dual Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

◎T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel, W/O Cap
R:Tape & Reel, With Cap

N:Non Type

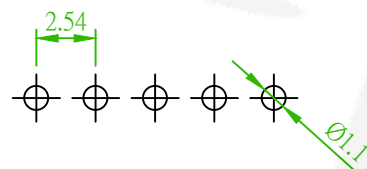
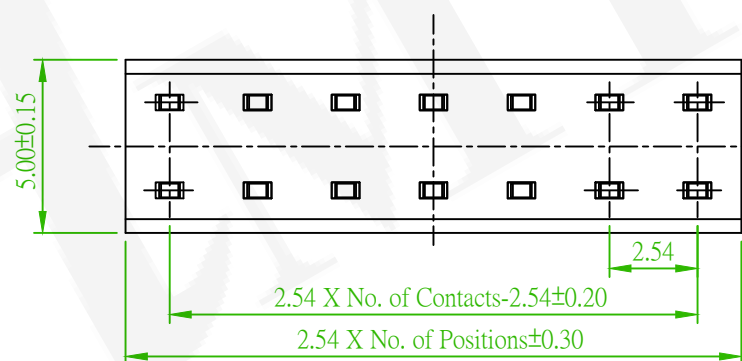

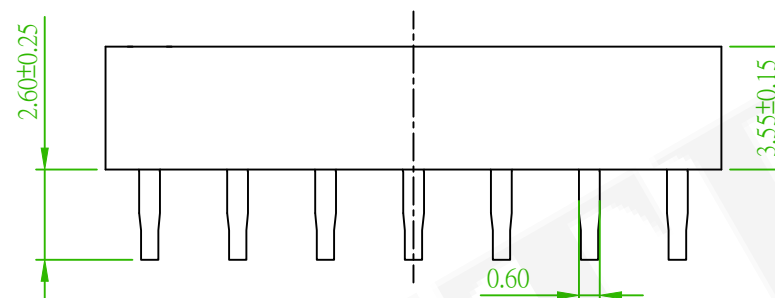
RoHS



AMTEK 耀德

2022.06.28

Released DCC

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No. :PS1S35-2XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1SDA35-2XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/27
	圖號 DRAWING NO.	GN003-AB400	版本 REV.	B	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO.:220102 Revise the drawing

Alice

2022/06/15

ECN NO. OR DESCRIPTION

REVISED

DATE

1