

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Phosphor Bronze


ORDER INFORMATION

5 P S 1 S D A 5 0 - 1 X X X X N N N X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash	S0:Selective	N:W/O Peg	N:W/O Bump	◎T:Tube, W/O Cap	RoHS		
		GA:5u"	SA:5u"			C:Tube, With Cap			
		GB:10u"	SB:10u"			H:Tape & Reel, W/O Cap			
		GC:20u"	SC:20u"			R:Tape & Reel, With Cap			
						N:Non Type			



AMTEK 糧德
2022.06.27
Released DCC

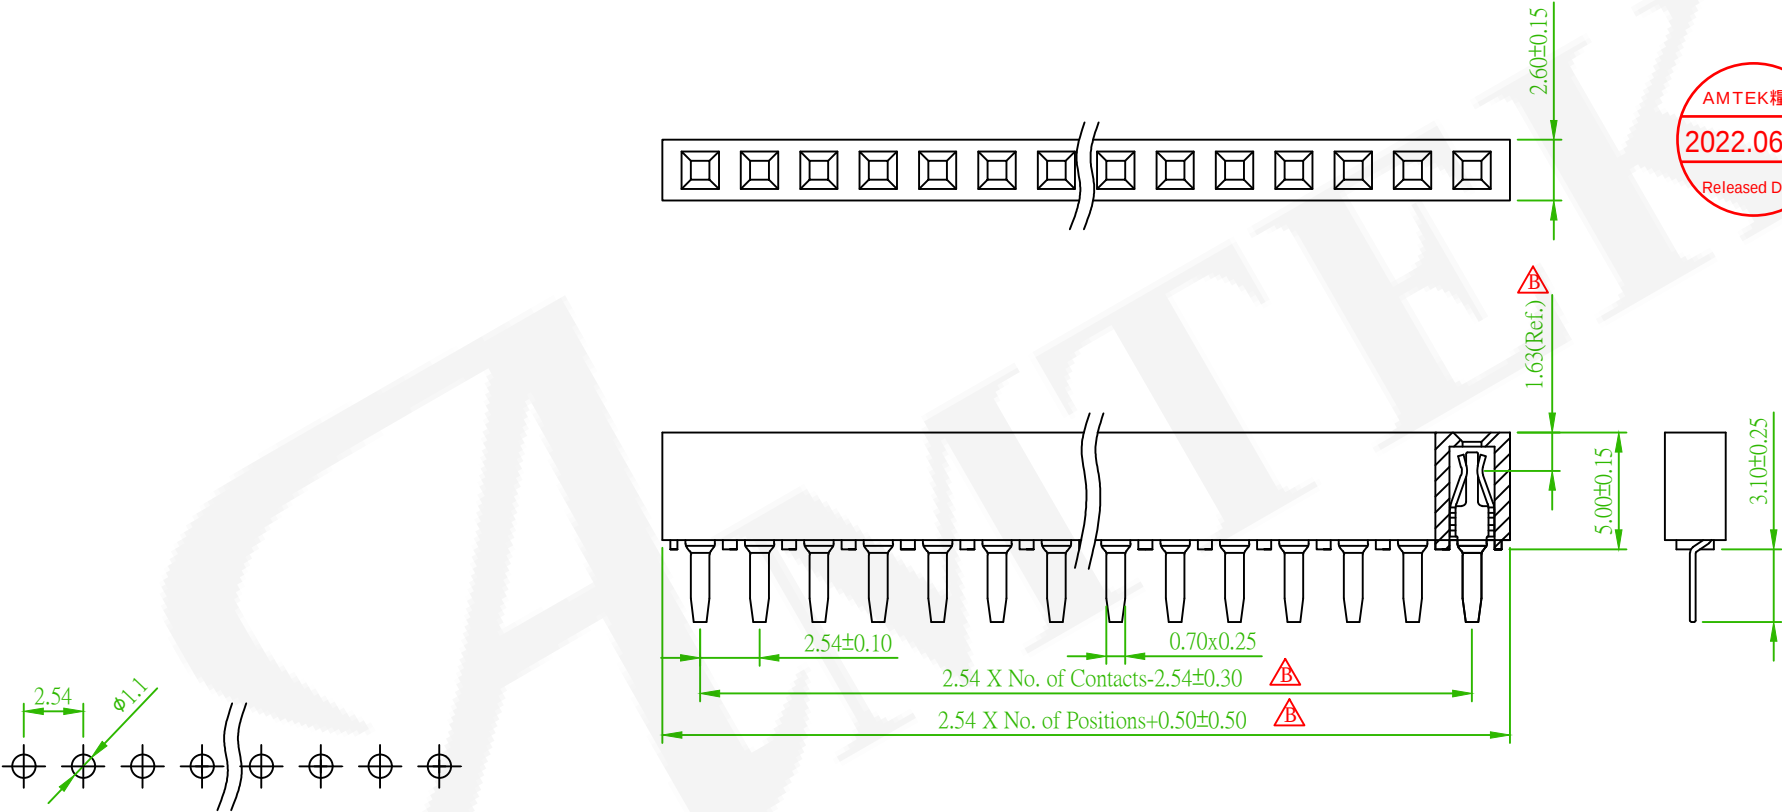

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS1S50-1XX-U

	ECN NO.:220102 Revise the drawing	Alice	2022/05/04
	ECN 201232.: Revise the drawing	David	2021/01/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1SDA50-1XXXXNNNXU-00				繪圖 DRAWN	Jeff 2015/08/27
	圖號 DRAWING NO.	GN003-BS709	版本 REV.	C	核對 CHECKED	John 2015/08/27	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	