

MATERIAL

Insulator:Nylon 9T, UL94V-0, Black
Contact Pin:Brass

ORDER INFORMATION

5 P S 1 S D D 8 5 - 3 X X X X N N N X U - 0 0

3:Triple Row

No. of Pin
Per Row(02~40)

◎G0:Gold Flash

GA:5u"
GB:10u"
GC:20u"
GD:30u"

S0:Selective

SA:5u"
SB:10u"
SC:20u"
SD:30u"

N:W/O Peg

N:W/O Bump


◎T:Tube, W/O Cap

X:Box


A:Tray, W/O Cap

RoHS



N:Non Type

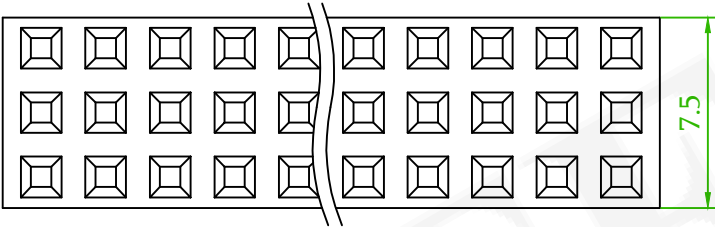

AMTEK 耀德
2022.06.27
Released DCC

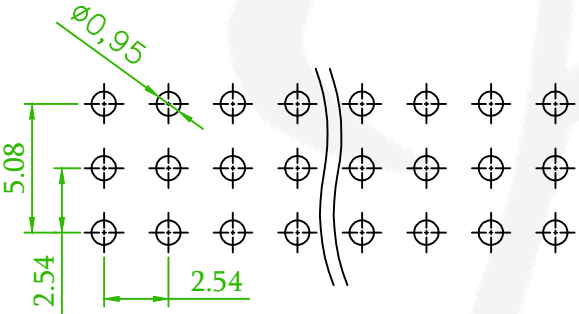

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

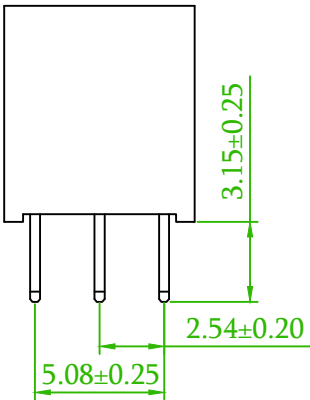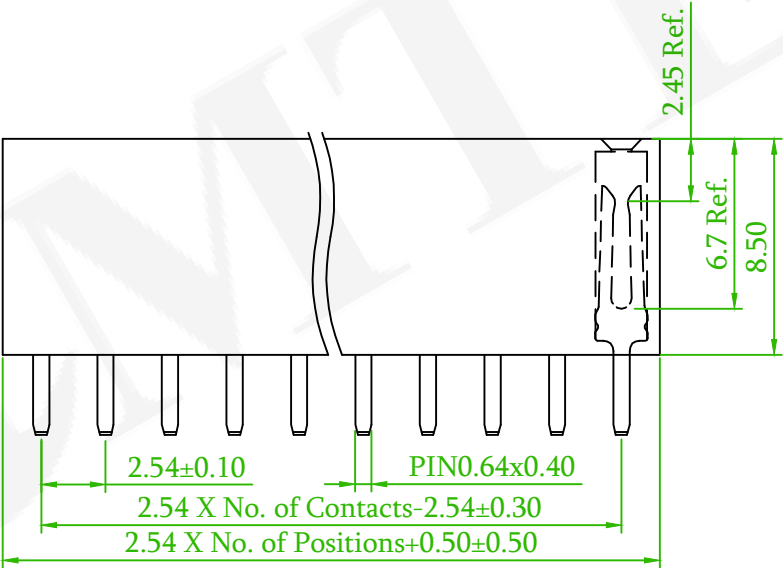

	ECN NO.:220102 Revise the drawing	Alice	2022/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1SDD85-3XXXXNNNXU-00				繪圖 DRAWN	Alice 2021/06/07
圖號 DRAWING NO.	GN147-AZ231	版本 REV.	B	核對 CHECKED	Josh 2021/06/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2021/06/07	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	