



MATERIAL △ △ **ORDER INFORMATION**

INSULATOR:LCP , UL94V-0, BLACK
CONTACT PIN:PHOSPHOR BRONZE


5 P S 1 S T A 8 5 - 1 X X X X X X X U - 0 0

AMTEK 懋德
2025.11.28
Released DCC

1:SINGLE ROW	NO. OF PIN PER ROW(02~40)	G0:GOLD FLASH GA:5u" GB:10u" GC:20u" GD:30u" TO:TIN PLATED TE:TIN 200u"	S0:SELECTIVE SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O PEG N:W/O BUMP	T:TUBE W/O CAP U:RoHS+HI-TEMP.
					DIM A A:3.17 B:3.96 C:5.08

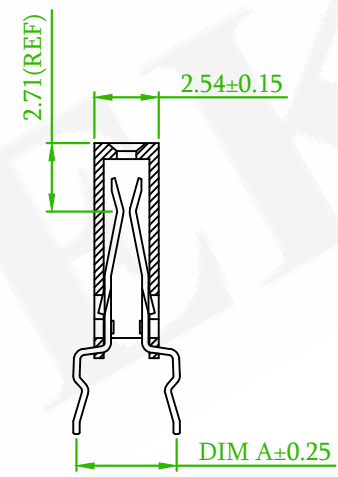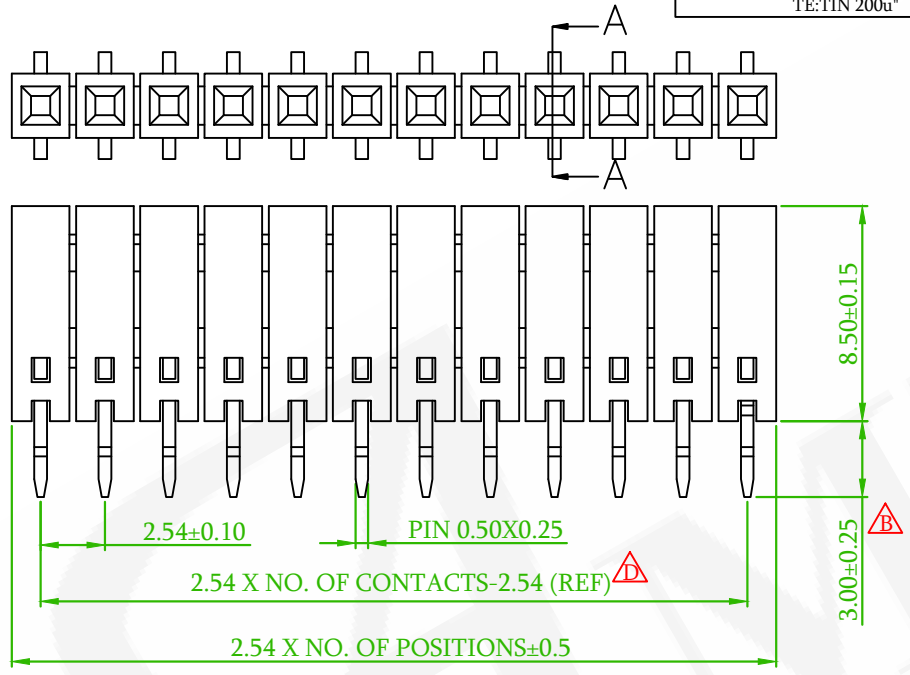

SECTION:A-A

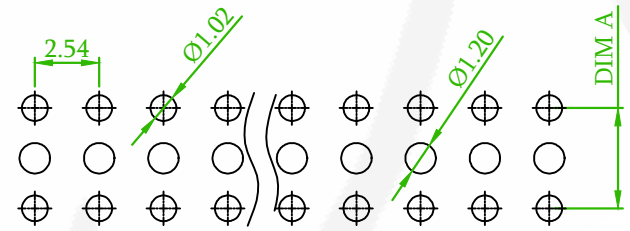

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

△	ECN-202511014	Oliver	2025/11/24
△x1	ECN NO.:220102 REVISE THE DRAWING	Alice	2022/06/15
△x4	ECN NO.: 180404 1.REVISE THE DIM.3.3->3.0 2.REVISE THE INSULATOR PBT->HI-TEMP	Mia	2018/05/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



懋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN SOCKET 2.54mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PS1STA85-1XXXXXXXXXU-00				繪圖 DRAWN	Mia 2015/08/28
圖號 DRAWING NO.	GN003-MD127	版本 REV.	D	核對 CHECKED	John 2015/08/28	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/28	
公差 TOLERANCE	.X ± 0.4 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		