

MATERIAL

INSULATOR: NYLON 9T, UL94V-0, BLACK
CONTACT PIN: PHOSPHOR BRONZE

ORDER INFORMATION


5 P S 1 T C B 8 5 - 1 X X X X X X X U - 0 0

1:SINGLE ROW	No. OF PIN PER ROW(02~25)	GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin PLATED TE:Tin 200u"	SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O PEG N:W/O BUMP	©T:TUBE, W/O CAP A:TRAY, W/O CAP B:BAG N:NON TYPE	RoHS
--------------	------------------------------	--	---	-------------------------	--	------


AMTEK 懽德

2025.10.23

Released DCC

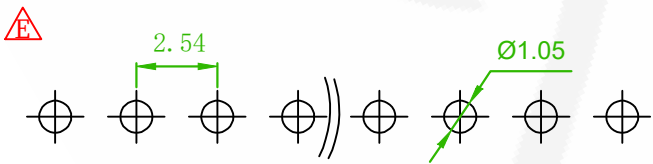

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

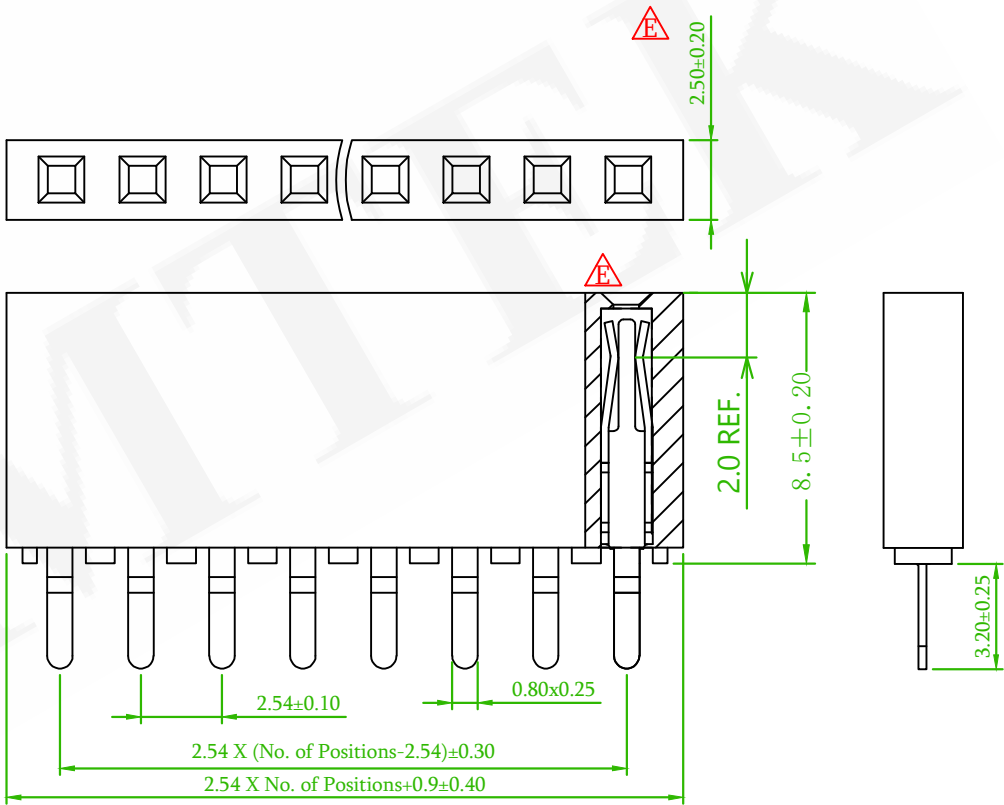

ECN-202510009	Gaby	2025/10/21
RECN2504000143	John	2025/04/30
ECN NO.:210916 Revise the drawing	Alice	2021/10/13
REV. ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK 懽德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm DIP V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PS1TCB85-1XXXXXXXXXU-00				繪圖 DRAWN	ROY 2017/01/16
圖號 DRAWING NO.	GN005-RL347	版本 REV.	E	核對 CHECKED	TONNY 2017/01/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	AARON 2017/01/16	
公差 TOLERANCE	.X ± 0.38 .X° ± 3° .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		