




MATERIAL

Insulator:Nylon 9T , UL94V-0 Black
Contact Pin:Phosphor Bronze


ORDER INFORMATION

5 P S 1 T M A 8 5 - 1 X X X X N N X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T0:Tin Plated TE:Tin 200u"	N:W/O Peg N:W/O Bump	©T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap	A:A Type B:B Type	RoHS
--------------	------------------------------	--	---	-------------------------------	-------------------------	---	----------------------	------

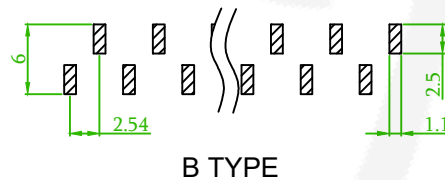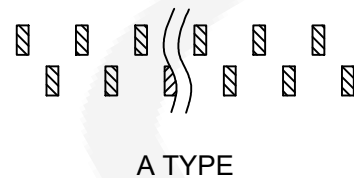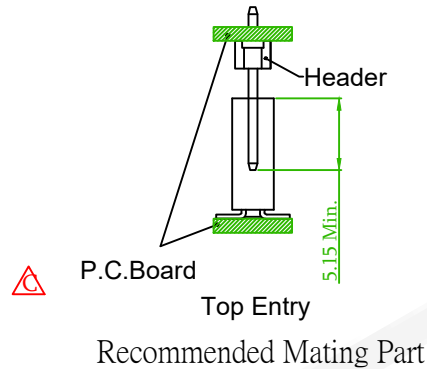


Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

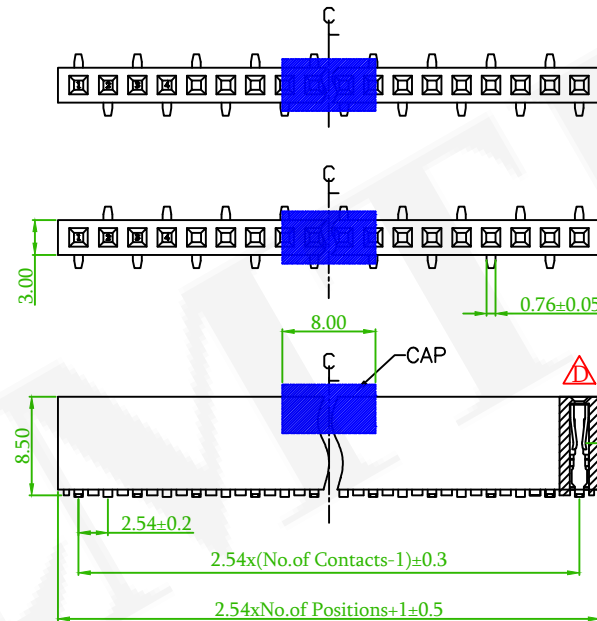

A TYPE

B TYPE



Old Part No. : PS1TM85-1XX-U

 x1	ECN NO.:220102 Revise the drawing	Alice	2022/05/11
 x1	Add the Contact point dimension	Alice	2021/11/10
 x1	Add the Recommended Mating Part	Eric	2019/01/29
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm S/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS1TMA85-1XXXXNNXXU-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-RL873	版本 REV.	E	核對 CHECKED	Josh 2018/10/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2018/10/04	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	