

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION



5 P S 2 B C A 4 3 - 2 X X X X X X X U - 0 0

2: Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0: Tin Plated TE: Tin 200u"	S0: Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	N:W/O Bump	N:Non Type	T:Tube W/O cap	RoHS
-------------	---------------------------	--	--	-----------	------------	------------	----------------	------



AMTEK 耀德

2024.01.05

Released DCC

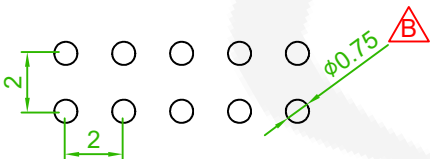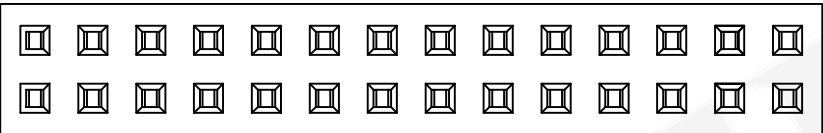

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

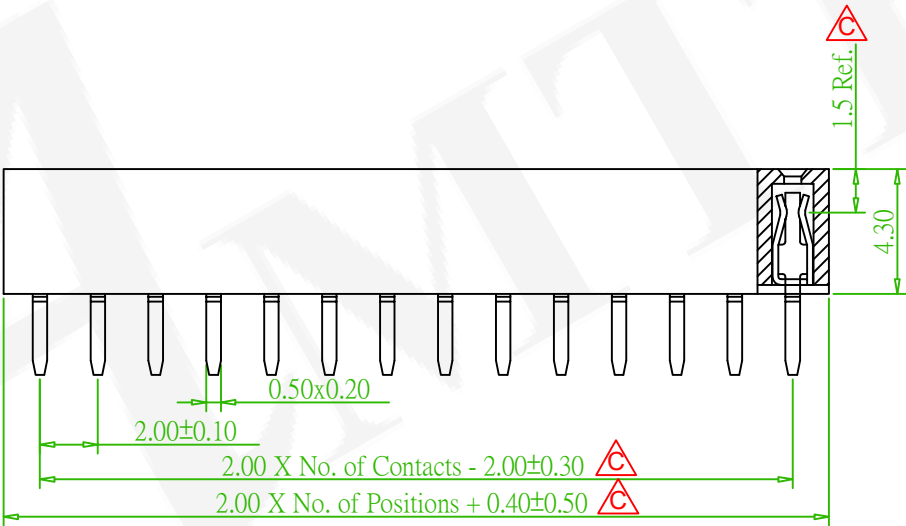

Old Part No. : PS2S43C-2XX-U

ECN NO.:231005 Revise the drawing	Randy	2023/10/23
ECN.NO.210722: Revise the drawing	David	2021/08/11
ECN.NO.190705:Cancel package option(C.H.R),Revise the Part No,DIM	Nick	2019/08/22
REV.	ECN NO. OR DESCRIPTION	REVISED DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm					頁數 Page	1/1
品號 PART NO.	5PS2BCA43-2XXXXXXXXXU-00			繪圖 DRAWN	Jeff 2016/12/05		
圖號 DRAWING NO.	GN110-NI312		版本 REV.	D	核對 CHECKED	Johnny 2016/12/05	
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/12/05	
公差 TOLERANCE	.X ±0.38 .XX ±0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION		