

MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION


5 P S 2 B M A 2 7 - 1 X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	A:A Type B:B Type	RoHS
		T0:Tin Plated TE:Tin 200u"		N:W/O Bump	R:T/R with cap C:Tube with cap	H:T/R W/O cap T:Tube W/O cap


AMTEK 耀德

2024.01.05


Released DCC




B: Type

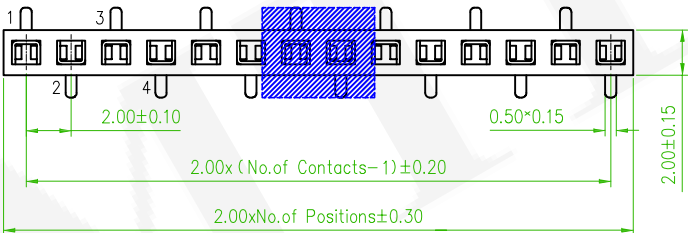


A: Type

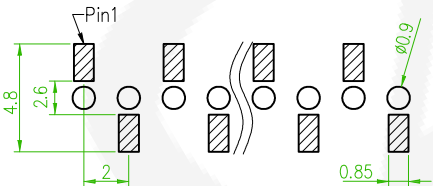

TYPE A



TYPE B



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. : PS2BM27-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2BMA27-1XXXXXXXXXU-00			繪圖 DRAWN	Athena 2015/08/2	
	圖號 DRAWING NO.	GN003-EA643	版本 REV.	C	核對 CHECKED	Josh 2019/01/3	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/3	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
	Add the Recommended Mating Part	Eric	2019/01/28
	ECN NO. OR DESCRIPTION	REVISED	DATE