



MATERIAL



Insulator: Nylon 9T, UL94V-0
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5	P	S	2	B	M	A	2	7	-	2	X	X	X	X	N	X	N	X	U	-	0	0
										2: Dual Row		No. of Pin Per Row (02~40)		◎G0: Gold Flash S0: Selective GA: 5u" SA: 5u" GB: 10u" SB: 10u" GC: 20u" SC: 20u" GD: 30u" SD: 30u" T0: Tin Plated TE: Tin 200u"		N: W/O Peg P: With Peg		N: Non Type		RoHS		
										N: W/O Bump		R: T/R with cap C: Tube with cap		H: T/R W/O cap T: Tube W/O cap								

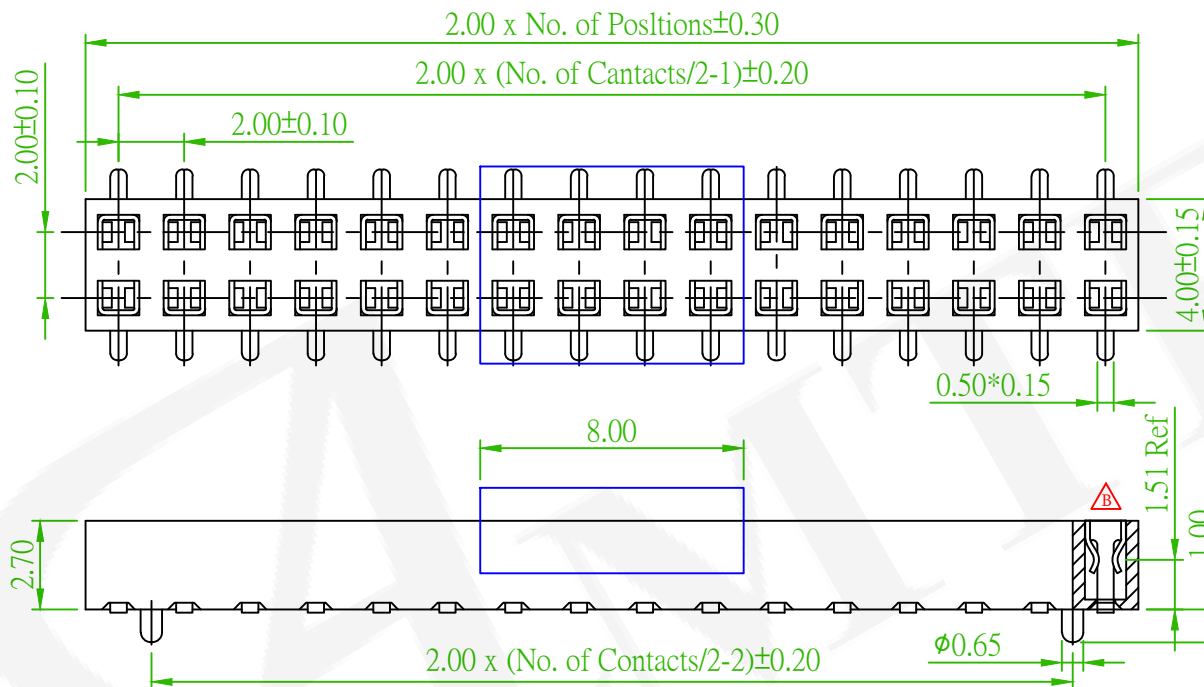

02~04 Pin

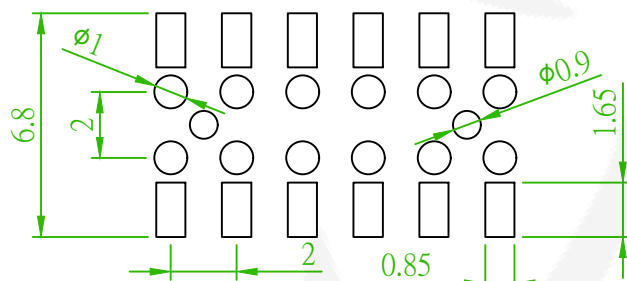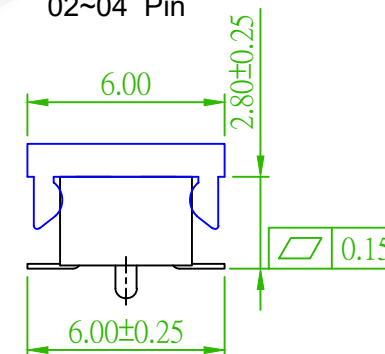

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

AMTEK 糧德
2021.11.01
Released DCC

Old Part No. : PS2BM27-2XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2BMA27-2XXXXNXXNU-00				繪圖 DRAWN	Athena 2015/08/26
	圖號 DRAWING NO.	GN003-AL564	版本 REV.	C	核對 CHECKED	John 2015/08/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/25
△x2	Add the Contact Point	Alice	2020/11/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE