

MATERIAL
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5

P

S

2

B

S

A

4

3

-

1

X

X

X

X

X

X

U

-

0

0

1:Single Row

No. of Pin
Per Row(03~40)

◎G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0:Tin Plated

TE:Tin 200u"

S0:Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N:W/O Peg

N:W/O Bump

◎T:Tube, W/O Cap

X:Box

H:Tape & Reel,W/O Cap


A:A Type

B:B Type


C:C Type

RoHS

AMTEK 耀德
2024.01.05
Released DCC

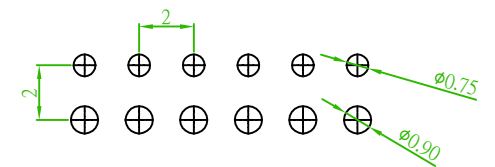

C Type

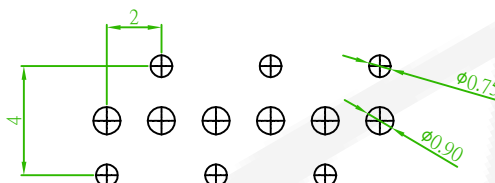


B Type




A Type


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

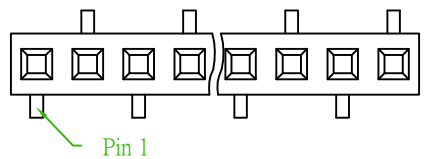


B Type

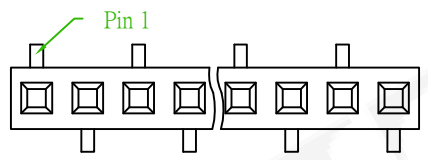


A Type

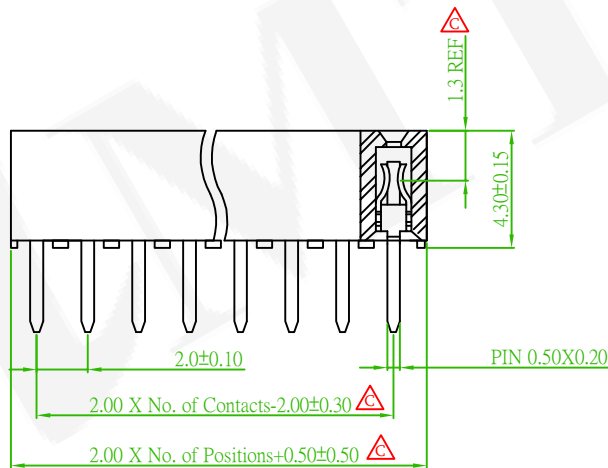

C Type

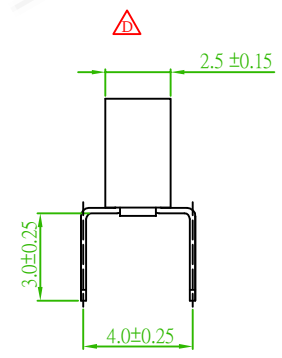

A,B Type

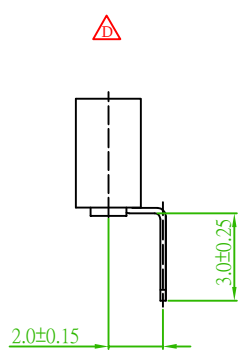

C Type

Old Part No. : PS2S43B-1XX-U

	ECN NO.:231005 Revise the drawing	Randy	2023/10/13
x4	ECN NO.230305: Revise the drawing	Rex	2023/03/16
x4	ECN NO.210631: Revise the drawing	David	2021/07/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2BSA43-1XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.	GN110-DW510	版本 REV.	E	核對 CHECKED	Josh 2019/01/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/30	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	