

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


5 P S 2 E S A 6 3 - 4 X X X X 5 X U L1/B - 0 0

4:Qual Row	No. of Pin Per Row(06~30)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u" S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T:Tube C:Tube With Cap U:RoHS+Hi Temp
------------	------------------------------	---	---


Released DCC



Part No	L1	B
5PS2ESA63-4XXXX5XU094023-00	9.35	2.28
5PS2ESA63-4XXXX5XU150018-00	15.0	1.8

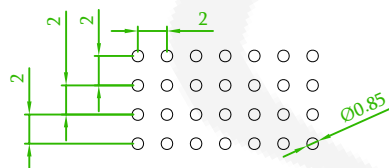

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

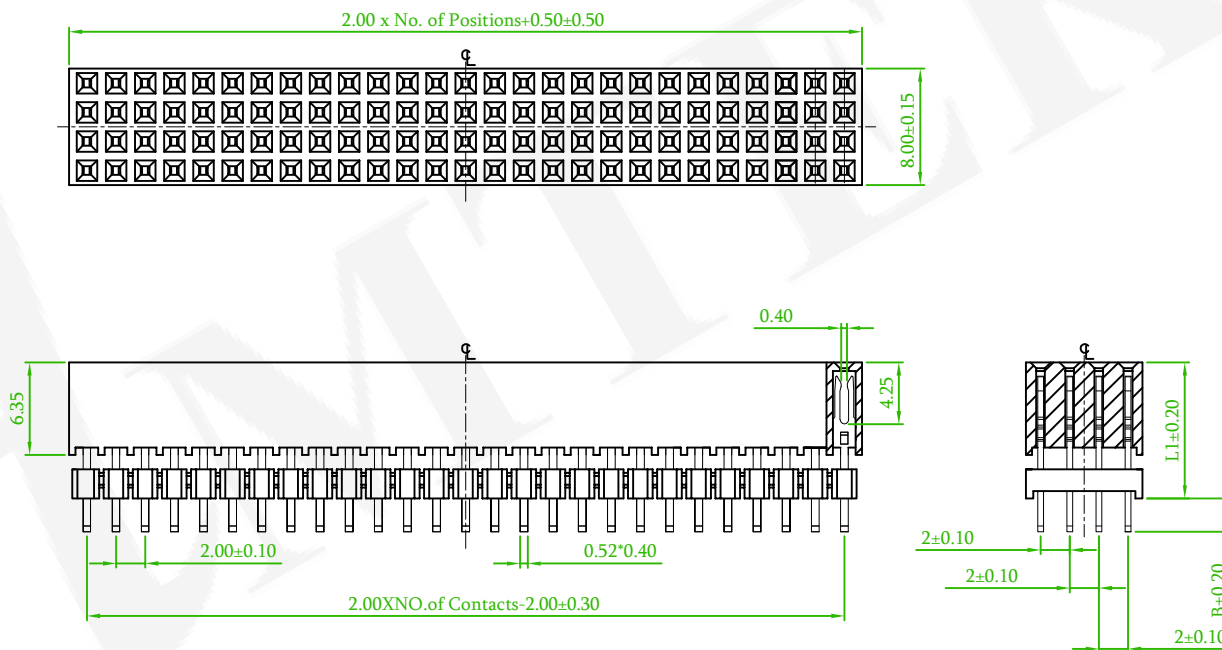

Old P/N:PS2E-4XX-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm Q/R V/T DIP TYPE					頁數 Page	1/1
	品號 PART NO.	 5PS2ESA63- 4XXXX5XUXXXXXX-00				繪圖 DRAWN	Volvo 2008/06/06	
	圖號 DRAWING NO.	GN003-RL176		版本 REV.	C	核對 CHECKED	Paul 2008/06/06	
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2008/06/06	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION		