

MATERIAL △C
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass


ORDER INFORMATION

5 P S 2 E S B 6 3 - 2 X X X X 5 X U XXXXXX - 0 0




2: Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T:Tube X:Box	U:RoHS+Hi Temp	See Table1
-------------	------------------------------	--	---	-----------------	----------------	------------

△B

Tabel 1		
Part No.	A	B
094023	9.35	2.28
203010	20.32	1.00

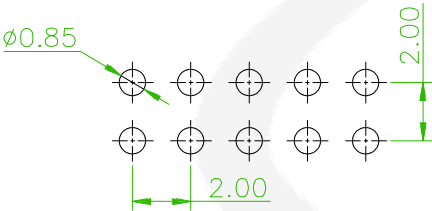

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

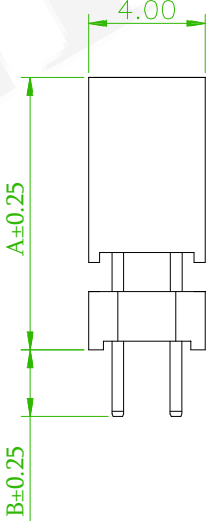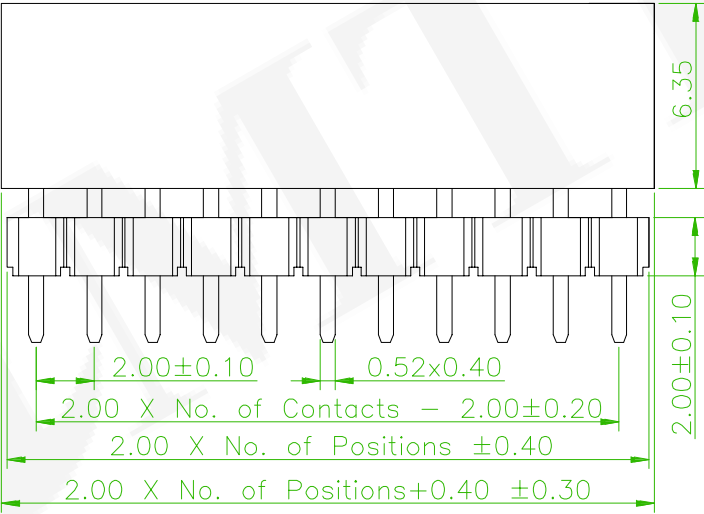

△C	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
△B ×3	Add the Dimension	David	2020/04/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	△B 5PS2ESB63-2XXXX5XUXXXXXX-00				繪圖 DRAWN	David 2019/10/21
	圖號 DRAWING NO.	GN147-DV422	版本 REV.	C	核對 CHECKED	Josh 2019/10/21	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/10/21	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	