


MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION


5 P S 2 K S A 4 6 - 2 X X X X X X X U - 0 0

AMTEK 耀德
2024.01.05
Released DCC



2: Dual Row	No. of Pin Per Row(02~40)	◎G0: Gold Flash	S0: Selective	N: W/O Peg	A: A Type B: B Type	RoHS
		GA: 5u"	SA: 5u"			
		GB: 10u"	SB: 10u"			
		GC: 20u"	SC: 20u"			
		GD: 30u"	SD: 30u"			
		T0: Tin Plated				
TE: Tin 200u"				N: W/O Bump	T: Tube H: Tape & Reel	

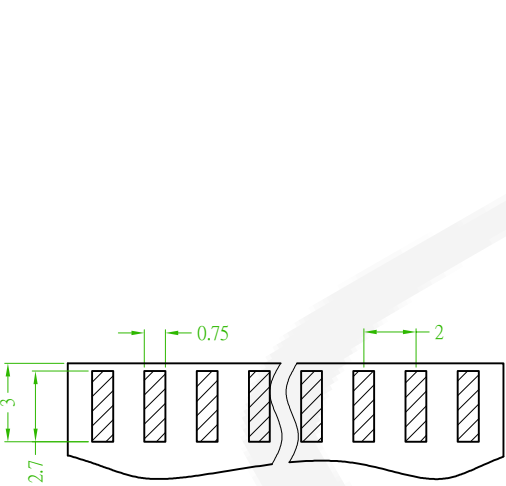


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

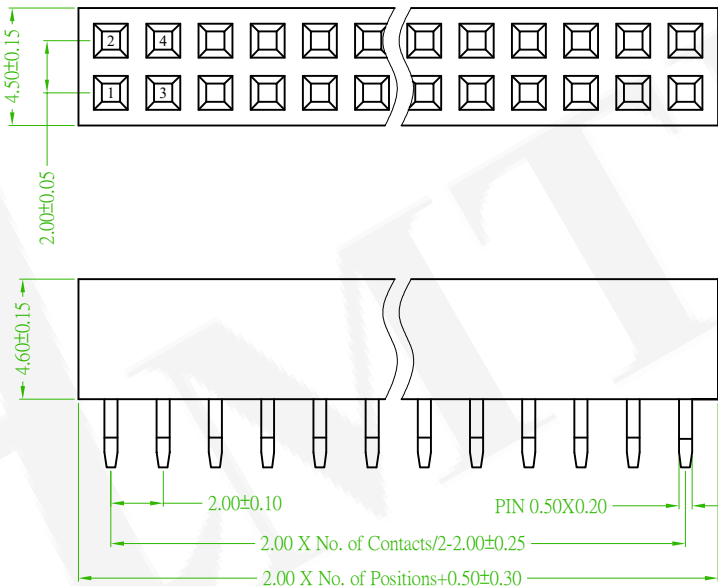

SECTION B-B



TYPE A



TYPE B

SECTION A-A

Old Part No. : PS2K46-2XX-U

REV.	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2KSA46-2XXXXXXXU-00 				繪圖 DRAWN	Athena 2015/08/25
	圖號 DRAWING NO.	GN110-RD149	版本 REV.	B	核對 CHECKED	John 2015/08/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/25	
	公差 TOLERANCE	.X ±0.25 .XX ±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		