


MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION


5 P S 2 M H A 2 0 - 1 X X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	GG:Gold Flash	SS:Selective	N:W/O Peg P:With Peg	N:Non Type	RoHS
		GA:5u"	SA:5u"			
		GB:10u"	SB:10u"			
		GC:20u"	SC:20u"			
		GD:30u"	SD:30u"			
		T0:Tin Plated				
		TE:Tin 200u"				
		N:W/O Bump	H:T/R W/O cap T:Tube W/O cap			

AMTEK 耀德
2024.01.05
Released DCC

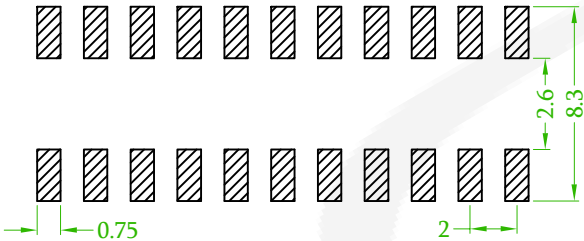

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

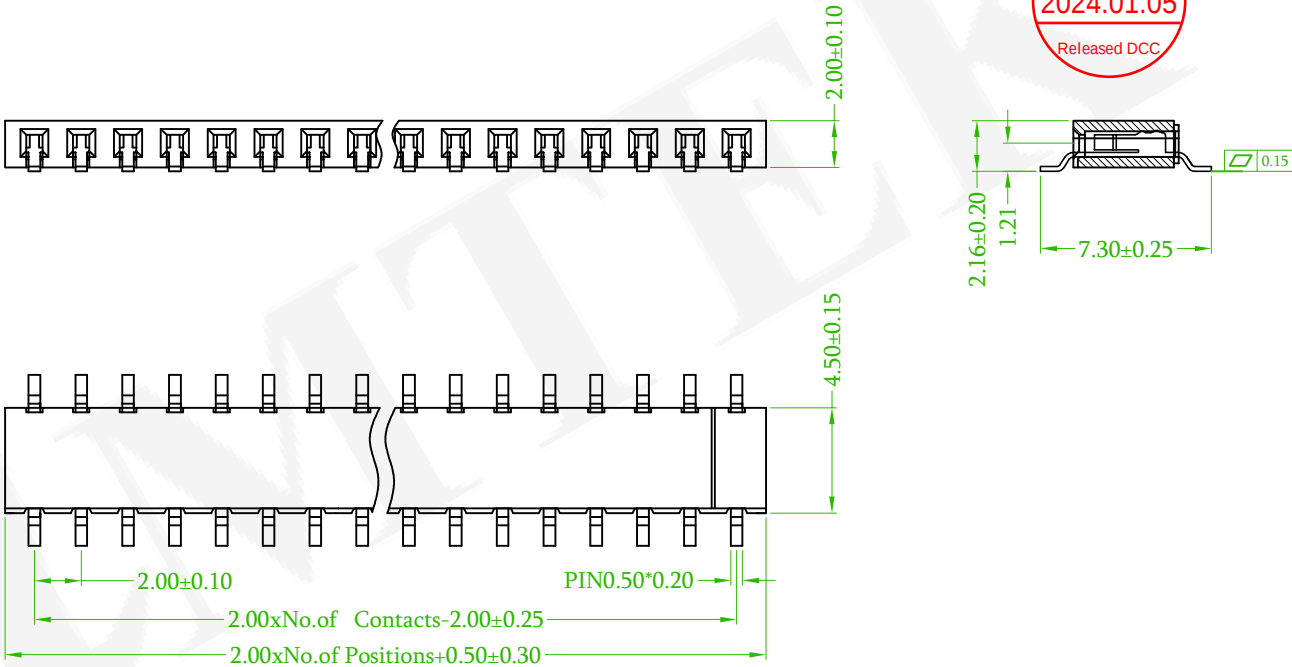

Old Part No. :PS2MS-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
 x2	ECN NO.:230301 Revise the drawing	Alice	2023/03/16

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	 5PS2MHA20-1XXXXXXXXXU-00 				繪圖 DRAWN	Sinnys 2008/07/17
	圖號 DRAWING NO.	GN003-RL173	版本 REV.	C	核對 CHECKED	Paul 2008/07/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2008/07/17	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		