

MATERIAL B

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P S 2 M R A 4 3 - 1 X X X X N N N X U - 0 0

1: Single Row

No. of Pin
Per Row (02~40)

G0: Gold Flash	S0: Selective Au
GA: Au 5u"	SA: Selective Au 5u"
GB: Au 10u"	SB: Selective Au 10u"
GC: Au 20u"	SC: Selective Au 20u"
GD: Au 30u"	SD: Selective Au 30u"
T0: Tin Plated	TE: Tin 200u"

N: W/O Peg

N: W/O Bump

N: Non Type

R: T/R with cap

C: Tube with cap


H: T/R W/O cap

T: Tube W/O cap

U: RoHS Hi-Temp.



AMTEK 耀德
2022.06.30
Released DCC

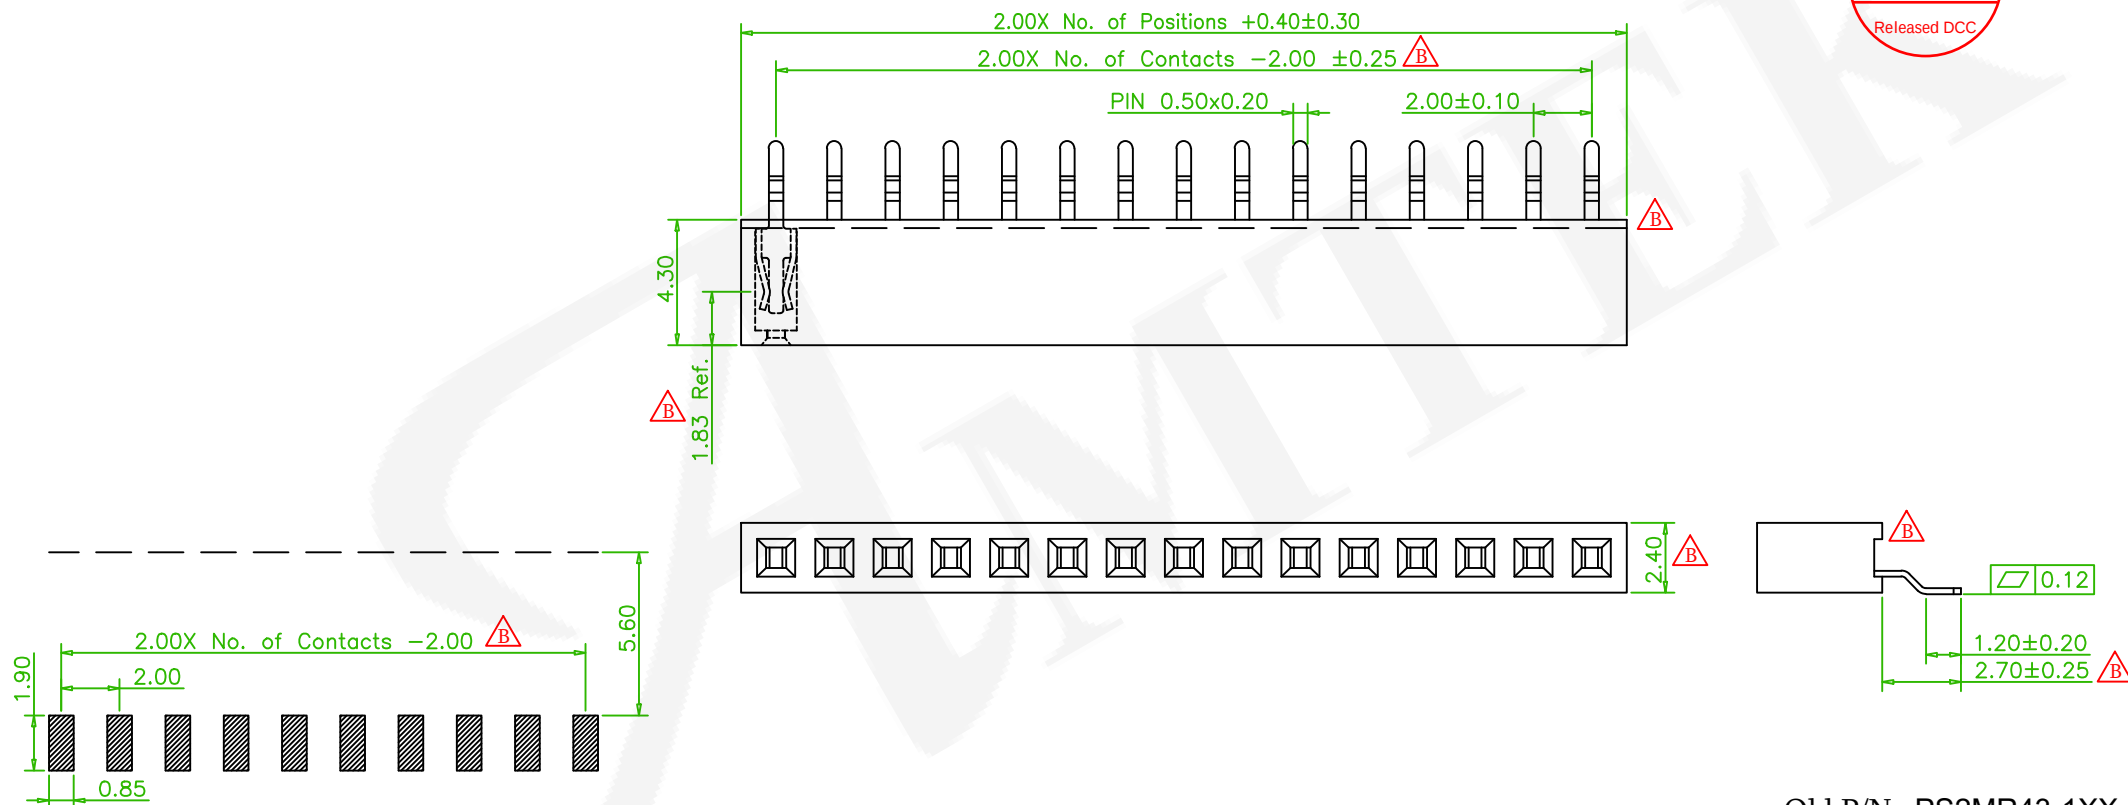

B Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old P/N : PS2MR43-1XX-U

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2MRA43-1XXXXNNNXU-00				繪圖 DRAWN	Roy 2015/09/25
	圖號 DRAWING NO.	GN003-GA043	版本 REV.	B	核對 CHECKED	Derek 2015/09/25	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/25	
	公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.: 220607 Revise the drawing	Alice	2022/6/27
	ECN NO. OR DESCRIPTION	REVISED	DATE