

MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 M S A 3 5 - 1 X X X X X X X X U - 0 0

©:Standard Recommend

1:Single Row

No. of Pin
Per Row(02~40)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

N:W/O Peg

N:W/O Bump

T:Tube W/O Cap
H:T/R W/O Cap
C:Tube With Cap
R:T/R With Cap

RoHS


A:A Type

B:B Type


AMTEK 糧德

2025.02.07

Released DCC

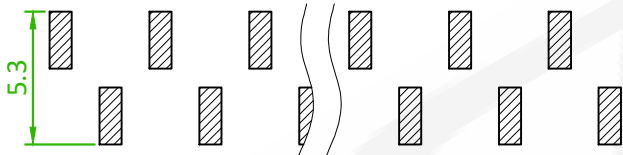


A Type

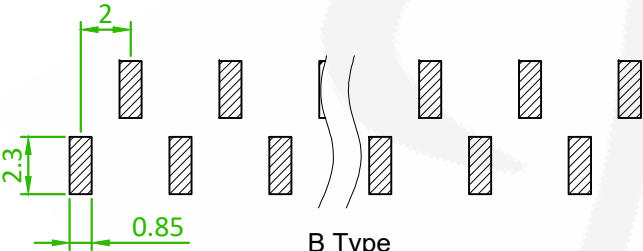


B Type

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

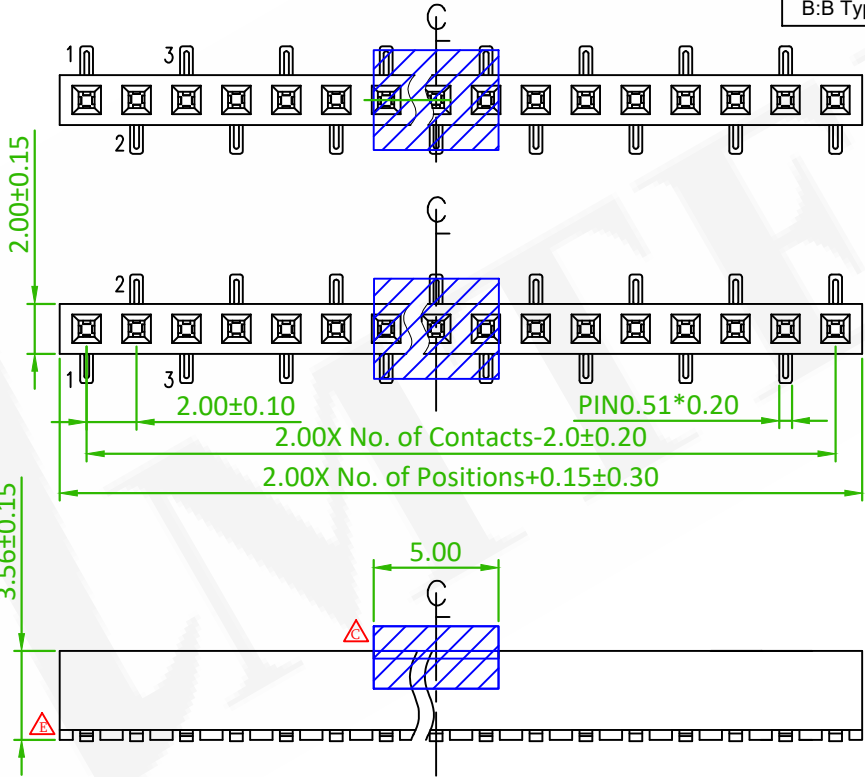

A Type

B Type



Old Part No. : PS2M35-1XX-U

	ECN 202501019.: Revise the drawing	David	2025/02/05
	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
	Add the Cap drawing	Benson	2022/05/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN SOCKET 2.00MM SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PS2MSA35-1XXXXXXXXU-00				繪圖 DRAWN	Jeff 2016/09/19
圖號 DRAWING NO.	GN003-AZ213	版本 REV.	E	核對 CHECKED	Johnny 2016/09/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	第三 ANGLE PROJECTION		