

MATERIAL


Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 M S A 3 5 - 2 X X X X X X X U - 0 0

2: Dual Row	No. of Pin Per Row (02~40)	◎G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u" T0: Tin Plated TE: Tin 200u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	N: W/O Peg P: With Peg	N: Non Type	RoHS
				N: W/O Bump	R: T/R with cap C: Tube with cap	H: T/R W/O cap T: Tube W/O cap

AMTEK 懋德
2025.02.07
Released DCC

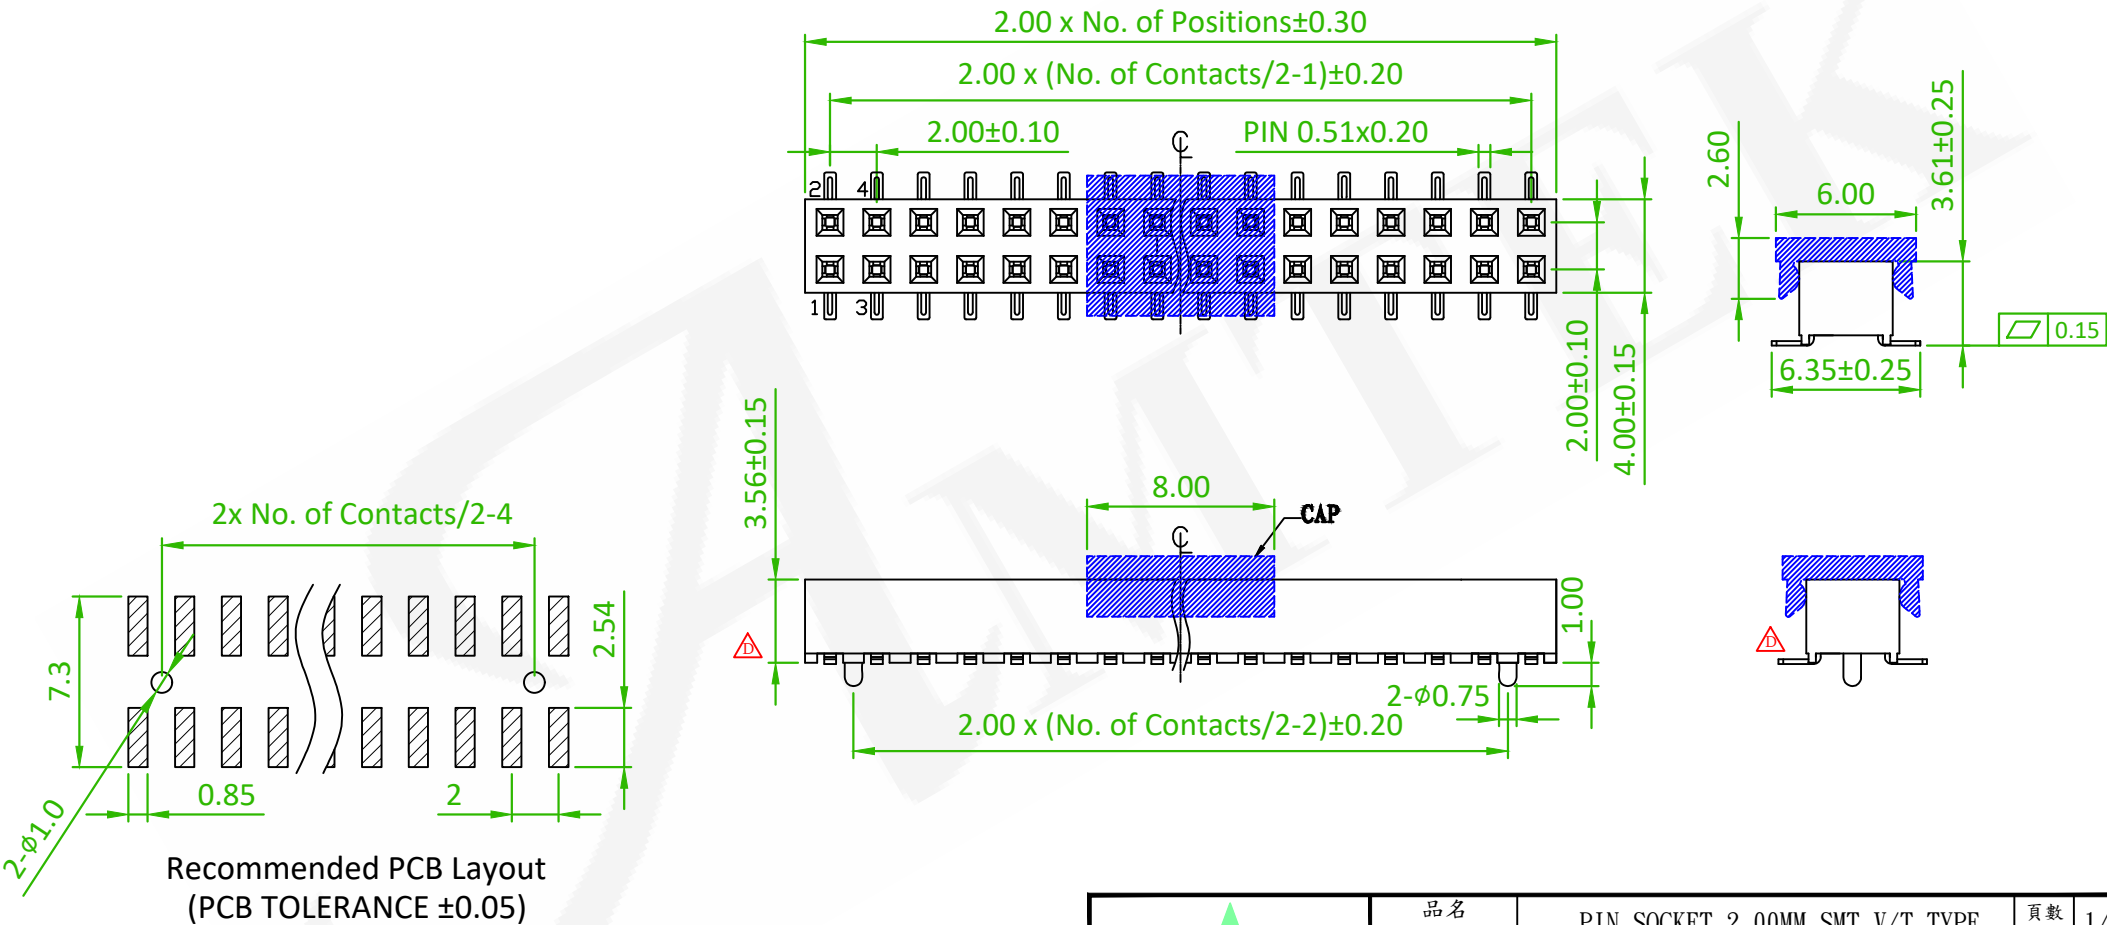

△	ECN202501019 Revise the drawing	David	2025/02/05
△	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
△	Add the Recommended Mating Part	Eric	2019/01/30
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
懋德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN SOCKET 2.00MM SMT V/T TYPE				頁數 Page	1/1
品號 PART NO.	5PS2MSA35-2XXXXXXXXU-00				繪圖 DRAWN	Athena 2015/08/26
圖號 DRAWING NO.	GN003-EA652	版本 REV.	D	核對 CHECKED	JOSH 2019/01/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	JOSH 2019/01/31	
公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		