

MATERIAL

INSULATOR: LCP, UL94V-0, BLACK
CONTACT PIN: BRASS

ORDER INFORMATION

5 P S 2 M S A 6 3 - 2 X X X X X X X X U - 0 0

©:STANDARD RECOMMEND

2:DUAL ROW

NO. OF PIN
PER ROW(02~40)

GO:GOLD FLASH

GA:5U"

GB:10U"

GC:20U"

GD:30U"

T0:TIN PLATED

TE:TIN 200U"

S0:SELECTIVE

SA:5U"

SB:10U"

SC:20U"

SD:30U"

N:W/O PEG

P:WITH PEG

N:W/O BUMP

T:TUBE W/O CAP

C:TUBE WITH CAP

H:T/R W/O CAP



R:T/R WITH CAP

M:T/R WITH MYLAR


N:NON TYPE

RoHS



AMTEK 耀德
2024.04.29
Released DCC

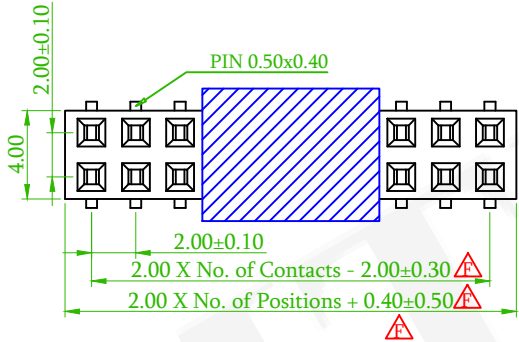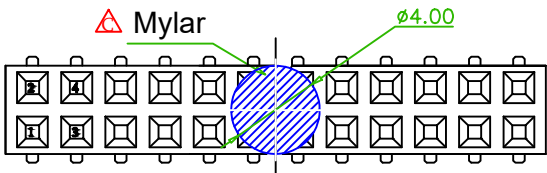

CAP	L	W	H1(REF.)
>3PIN	8.0	6.5	1.2
3PIN	6.0	6.7	1.0

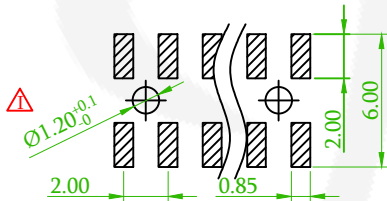

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

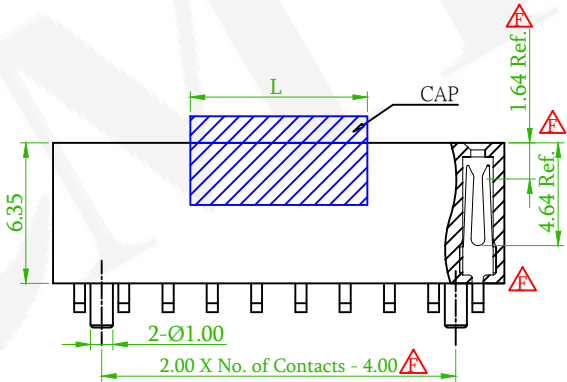

	ECN No.:240407 Revise the drawing	Randy	2024/04/29
	ECN NO.:231005 Revise the drawing	Randy	2023/10/18
x1	Add the Total Height Dimension	Alice	2022/09/07
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	PIN SOCKET 2.0mm SMT V/T TYPE				頁數 Page	1/1
	品號 PART NO.	5PS2MSA63-2XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2016/09/19
	圖號 DRAWING NO.	GN003-MD016	版本 REV.	I	核對 CHECKED	Johnny 2016/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/19	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		