

MATERIAL △G




Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 M S C 2 8 - 2 X X X X X X X U - 0 0 △G



2: Dual Row	No. of Pin Per Row(02~40)	◎G0: Gold Flash GA: 5u" GB: 10u" GC: 20u" GD: 30u"	S0: Selective SA: 5u" SB: 10u" SC: 20u" SD: 30u"	T0: Tin Plated TE: Tin 200u"	N: W/O Peg P: With Peg	N: W/O Bump	N: Non Type	U: RoHS+Hi-Temp.
							R: T/R with cap C: Tube with cap (Above 2x3 Pin) F: Tube W/O cap (Above 2x3 Pin) H: T/R W/O Cap M: T/R with Mylar	

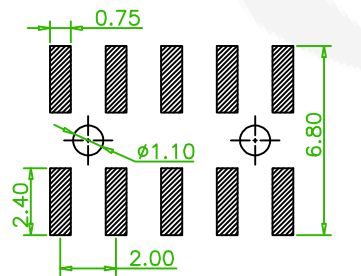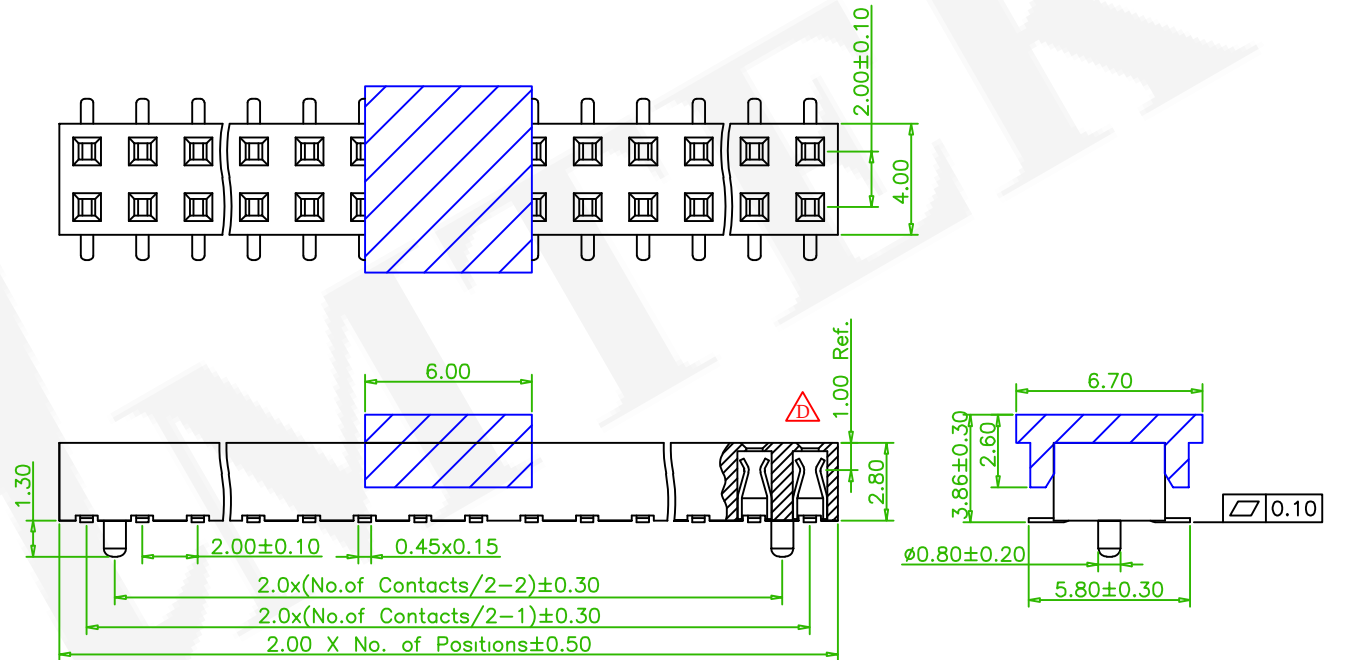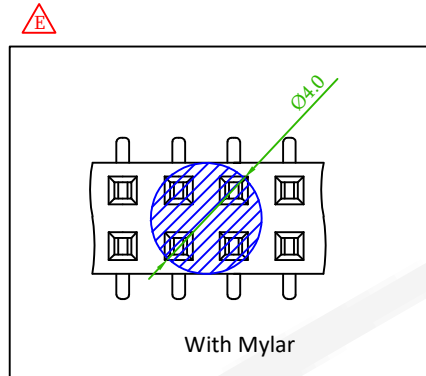

Recommended PCB Layout
(PCB TOLERANCE ±0.05) △D

 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2MSC28-2XXXXXXXXXU-00			繪圖 DRAWN	Mia 2017/11/23	
	圖號 DRAWING NO.	GN110-MC777	版本 REV.	G	核對 CHECKED	Josh 2019/01/31	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/31	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	△D X° ± 5°	單位 UNIT	mm	THIRD ANGLE PROJECTION	

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

△G	ECN NO.:231005 Revise the drawing	Randy	2023/10/19
△F x2	Add the Package Options	Alice	2023/04/28
△E x2	Add the Package Options	Rex	2023/02/08
△D x3	ECN NO.:210653 Revise the Drawing	Benson	2021/07/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE