


MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze


ORDER INFORMATION

5 P S 2 R D A 4 8 - 2 X X X X X X X U - 0 0



2: Dual Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	T0:Tin Plated TE:Tin 200u"	N:W/O Peg N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap N:Non Type	RoHS
-------------	---------------------------	---	---	-------------------------------	-------------------------	---	------

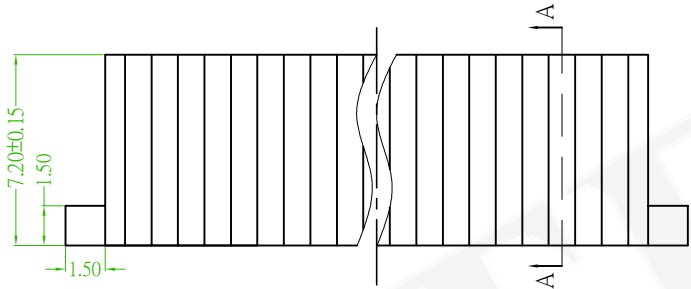

AMTEK 糧德
2024.01.05
Released DCC

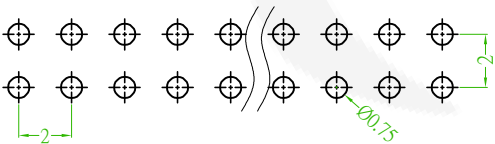

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

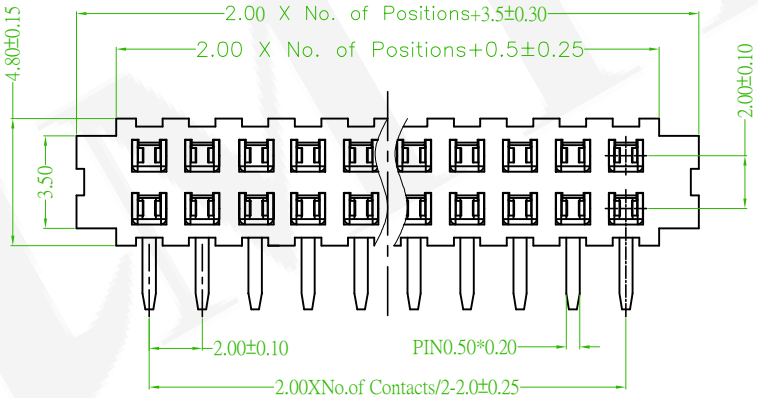

SECTION A-A

Old Part No. : PS2R48-2XX-U

REV.	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2RDA48-2XXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.	GN110-RD162	版本 R V.	B	核對 CHECKED	John 2015/08/26	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	