


MATERIAL △C
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5 P S 2 S D A 4 0 - 1 X X X X X X X X U - 0 0

1:Single Row	No. of Pin Per Row(02~40)	◎G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg	N:W/O Bump	◎T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel,W/O Cap R:Tape & Reel,With Cap N:Non Type	RoHS
--------------	------------------------------	---	--	-----------	------------	--	------

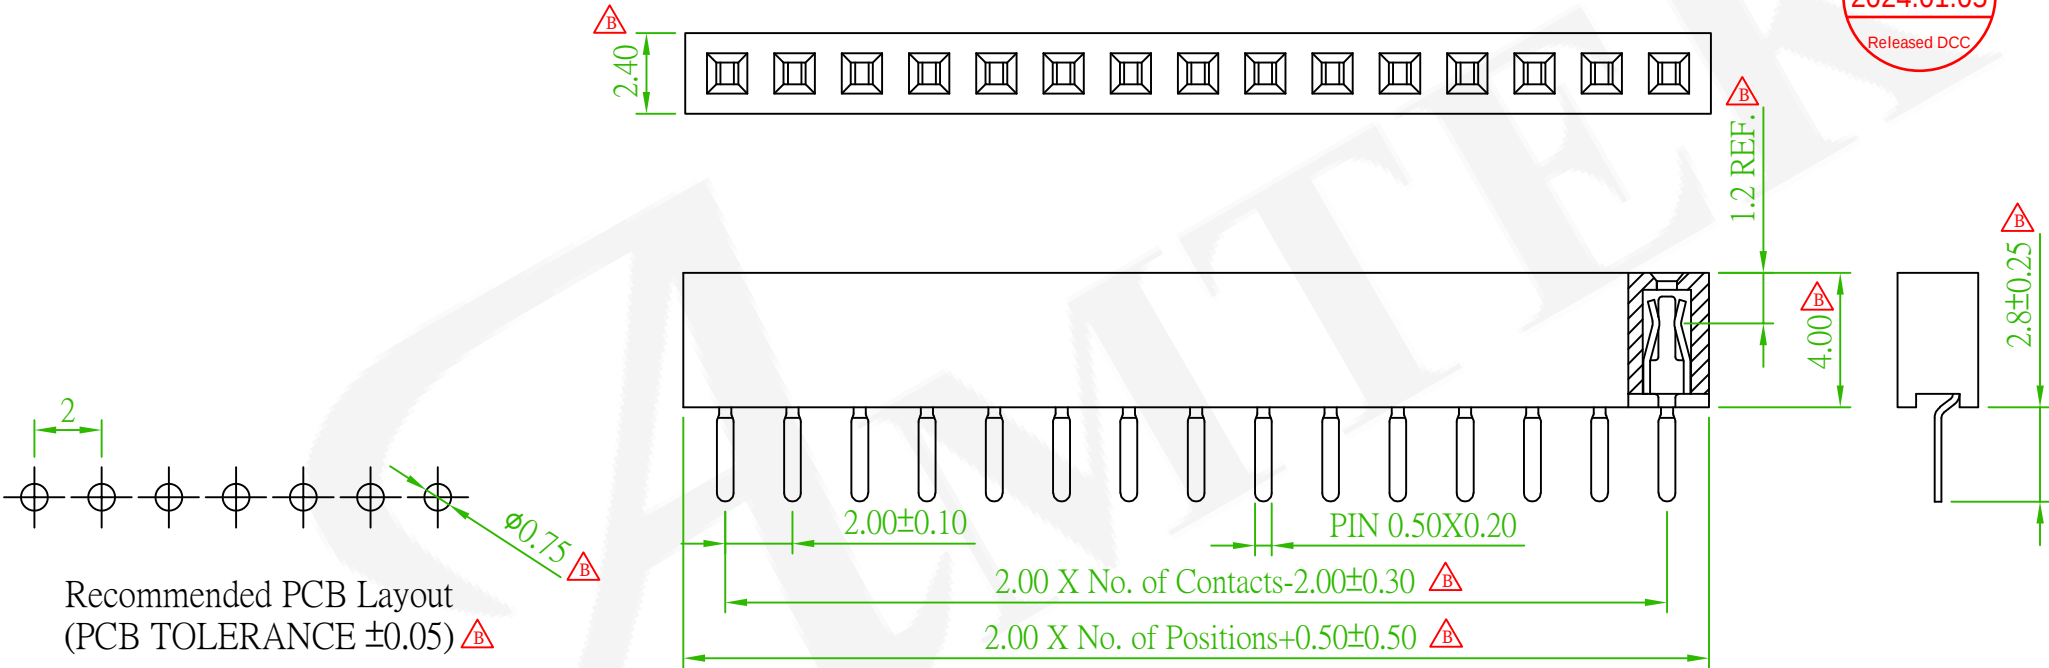

Old Part No. : PS2S40-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△C	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
△B 8	ECN NO.210659: Revise the drawing	David	2021/07/23

	品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
	品號 PART NO.	5PS2SDA40-1XXXXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/26
	圖號 DRAWING NO.	GN147-DW517	版本 REV.	C	核對 CHECKED	John 2015/08/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	