

MATERIAL △ △
INSULATOR: NYLON 6T, UL94V-0, BLACK
CONTACT PIN: PHOSPHOR BRONZE

ORDER INFORMATION

5

P

S

2

S

D

A

4

0

-

2

X

X

X

X

X

X

U

-

0

0

2:DUAL ROW

NO. OF PIN
PER ROW(03~40)

G0:GOLD FLASH

GA:5U"

GB:10U"

GC:20U"

GD:30U"

T0:TIN PLATED

TE:TIN 200U"

S0:SELECTIVE

SA:5U"

SB:10U"

SC:20U"

SD:30U"


N:W/O PEG

B:WITH BUMP


T:TUBE

N:NON TYPE

RoHS

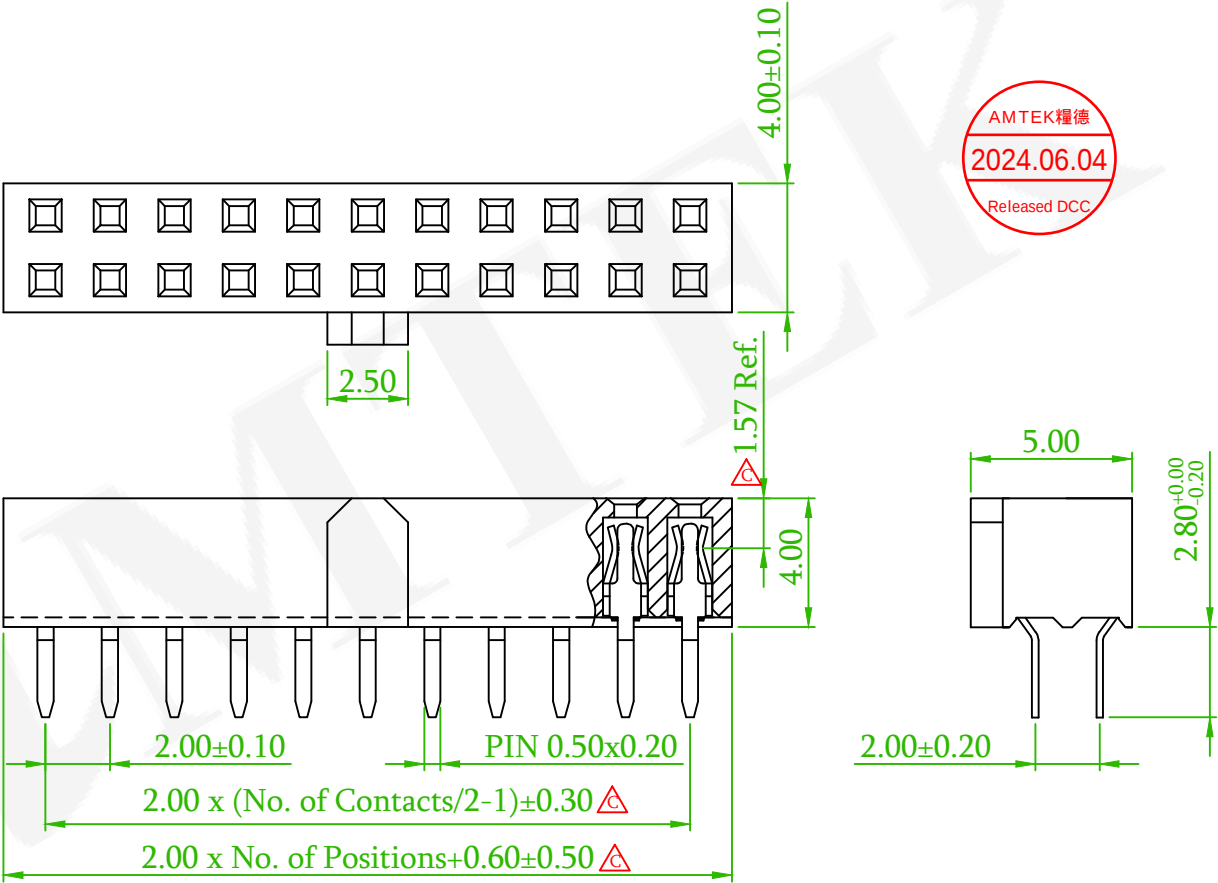

AMTEK 糧德
2024.06.04
Released DCC

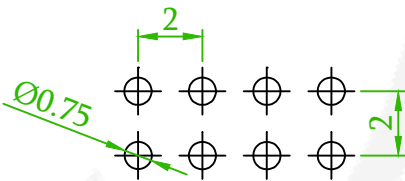

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

OLD PART NO. : PS2SB40-2XX-U

△ E	ECN NO.:240515 Revise the drawing	Randy	2024/05/30
△ D	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
△ C x5	ECR NO. :210108 Revise the drawing	Benson	2021/02/12
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN SOCKET 2.0mm DIPM V/T TYPE				頁數 Page	1/1
品號 PART NO.	△ A C 5PS2SDA40-2XXXXXXXU-00	繪圖 DRAWN	Roy 2016/09/14			
圖號 DRAWING NO.	GW013-GA452	版本 REV.	D	核對 CHECKED	Jonny 2016/09/14	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/14	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	