

MATERIAL 
Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze

ORDER INFORMATION

5

P

S

2

S

D

A

4

3

-

2

X

X

X

X

X

X

X

U

-

0

0

2: Dual Row

No. of Pin
Per Row(02~25)

◎G0:Gold Flash

GA:5u"

GB:10u"

GC:20u"

GD:30u"

T0: Tin Plated

TE: Tin 200u"

S0: Selective

SA:5u"

SB:10u"

SC:20u"

SD:30u"

N: W/O Peg

B: With Bump

◎T: Tube, W/O Cap

C: Tube, With Cap



H: Tape & Reel, W/O Cap

R: Tape & Reel, With Cap

N: Non Type

RoHS

AMTEK 糧德
2024.01.05
Released DCC

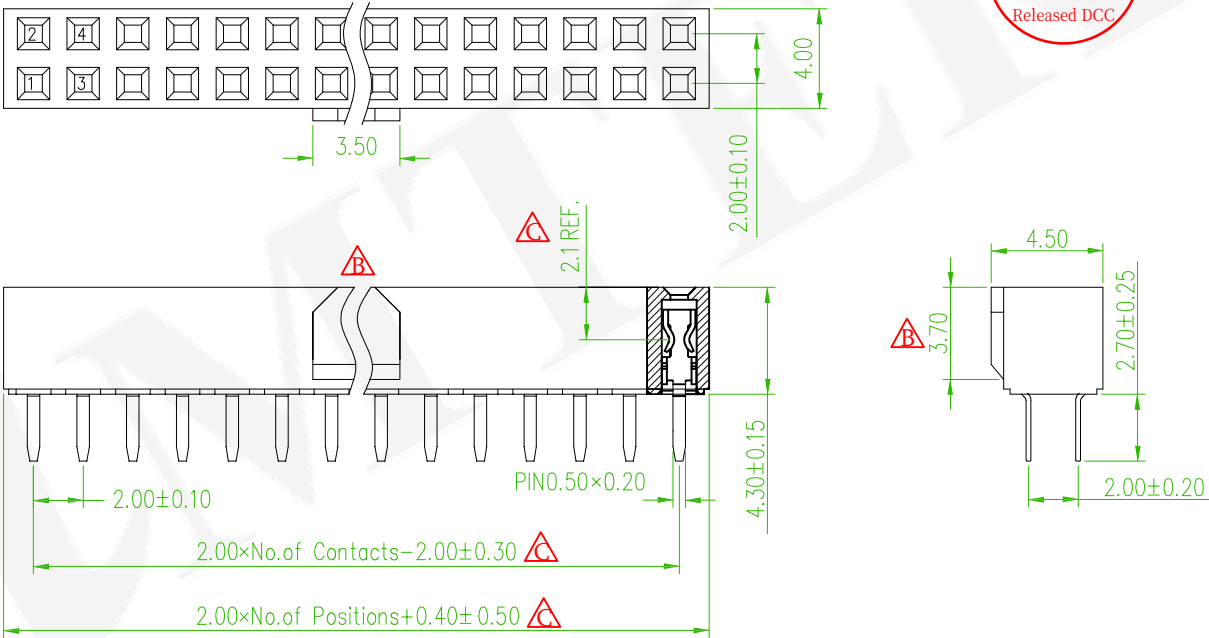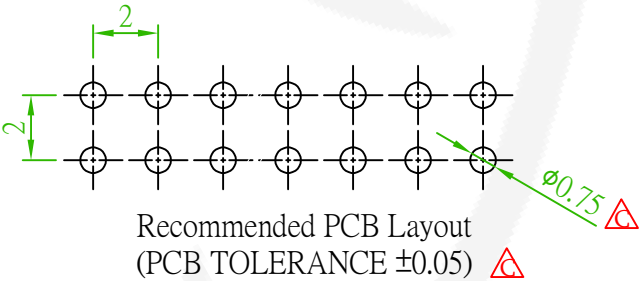

Old Part No. : PS2SB43-2XX-U

	ECN NO.:231005 Revise the drawing	Randy	2023/10/23
 x5	ECN NO. 210618 Revise the drawing	David	2021/07/01
 x2	ECN NO. 190813 Revise the drawing	Benson	2019/09/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm				頁數 Page	1/1
品號 PART NO.	5PS2SDA43-2XXXXXXXU-00				繪圖 DRAWN	Jeff 2015/08/27
圖號 DRAWING NO.	GN003-BS277	版本 REV.	D	核對 CHECKED	John 2015/08/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/27	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	